

# PURCHASE INFORMATION

**FORTEC**  
INTEGRATED


## BLO-LINE® A1 MONITORS

What do you have to decide before ordering your BLO-Line®?


### ALIGNMENT

Please specify when ordering, whether the monitor should be installed in portrait or landscape mode. Both versions are priced the same. The construction is adapted to the respective type of installation (here front view of the mounting plate).

#### LANDSCAPE




BLO-Line® 24 - 43 Landscape

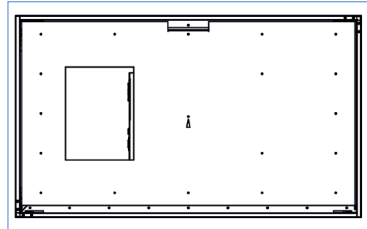


BLO-Line® 46 - 64.5 Landscape

#### PORTRAIT



BLO-Line® 24 - 43  
Portrait




BLO-Line® 46 - 64.5  
Portrait

### CABLE CONNECTIONS

The monitor is attached to the mounting plate in such a way that the sockets/ connections are in the area of the recess in the wall mount. If this is not possible, you can order our optional cable canal connection suitable for the respective screen size. This gives you the possibility of installing a fireproof cable canal up to the monitor and laying the required cables, e.g. for power or video signals, right into the monitor. The cable canal connection is 47 mm in width, 100.5 mm in length and 30 mm in depth. The position varies depending on the size in the landscape format. A fitting cable canal suitable for fire protection up to your connection possibility should be selected so that it covers our cable canal. You will find the dimensions of the recesses, the cable canal connection and the monitor in the drawings of the respective screen size on our homepage in the download area.

<https://www.distec.de/en/service/downloads/monitor-downloads/>

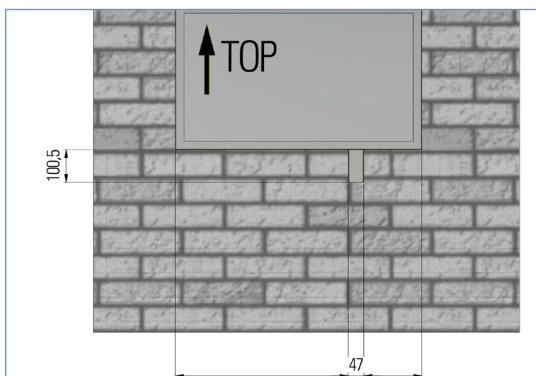



Of course, will your contact person from our sales department be happy to advise you. If you have any questions about ordering or installing our monitors, we will be happy to assist you.  
Alternatively, please contact us by email at [solution@distec.de](mailto:solution@distec.de).

# BLO-Line® A1 Installationshinweise

## Connections behind the monitor



## Connections separated from the monitor

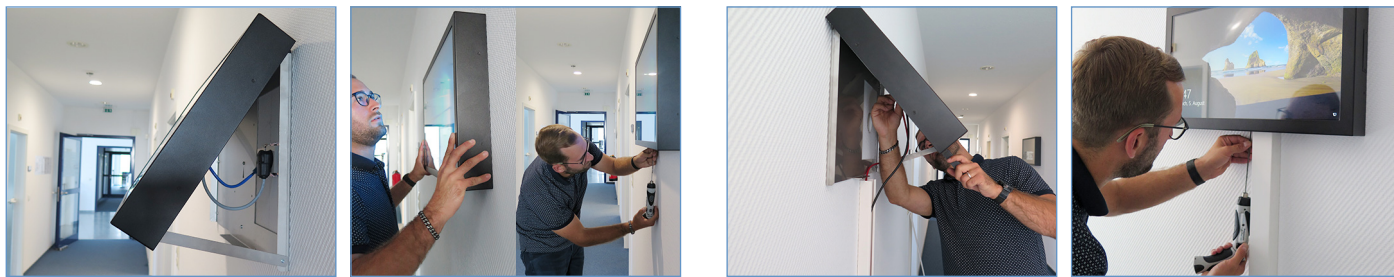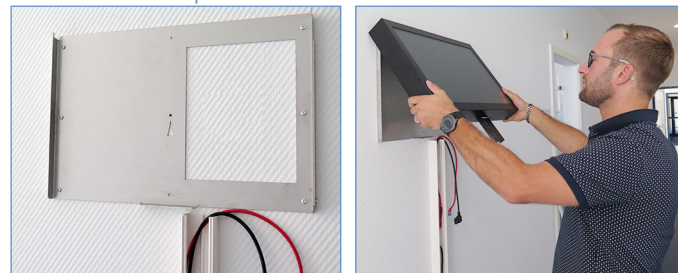

## DIMENSIONS FOR ATTACHMENT



The device is mounted on the mounting plate on the wall. Please note the following dimensions for the monitors. The center mark (narrow triangle) in the mounting plate is aligned with the center of the monitor - not the center of the mounting plate.

Dimensions in mm:

Panel size   orientation	A (in mm)	B (in mm)	C (in mm)	D (in mm)	E (in mm)	F (in mm)	G (in mm)
24" Portrait	42.5	190	125	125	182	296	—
24" Landscape	30	200	149.5	115.5	296	182	—
31.5" Portrait	122.5	190	125	125	221	376	—
31.5" Landscape	115	200	156.5	143.5	376	221	—
43" Portrait	tbd	tbd	tbd	tbd	tbd	tbd	—
43" Landscape	tbd	tbd	tbd	tbd	tbd	tbd	—
46" Portrait	159	240	175	175	317	539.5	—
46" Landscape	160	240	175	175	539.5	317	—
54.6" Portrait	211.5	250	158	160	369	633.5	60.5
54.6" Landscape	200	250	158	158	633.5	369	62.5
64.5" Portrait	60	375	175	175	428	740.5	—
64.5" Landscape	70	350	175	175	740.5	428	—



# BLO-Line® A1 Installationshinweise

BLO-Line® monitors 24"/ 31.5" and 43"

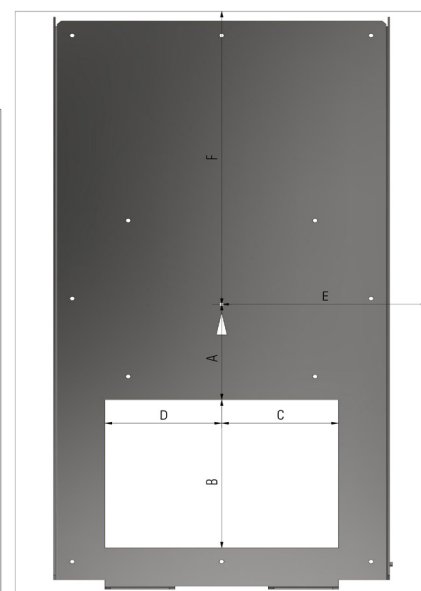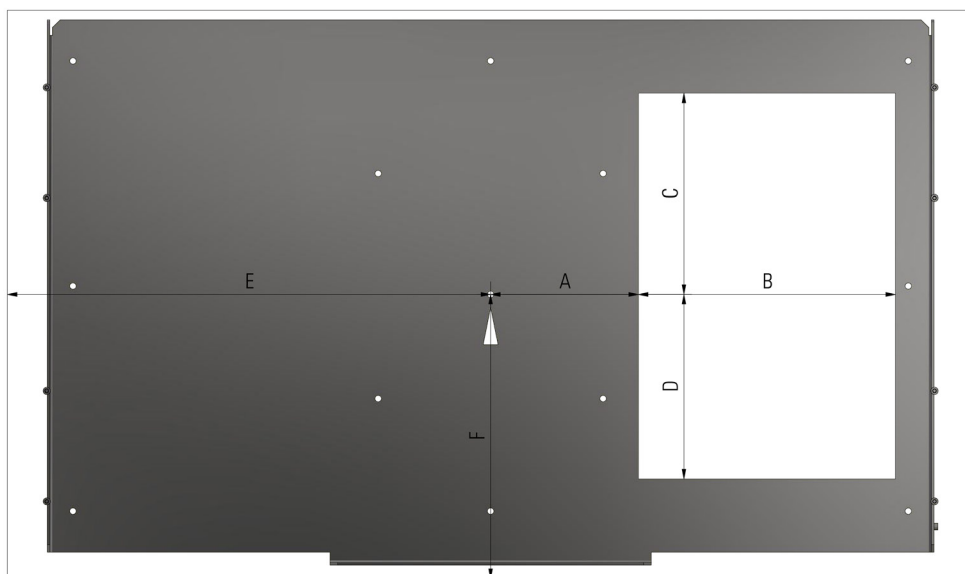

Monitor Außenmaß  
External dimensions



BLO-Line® monitors 46" and 64.5"

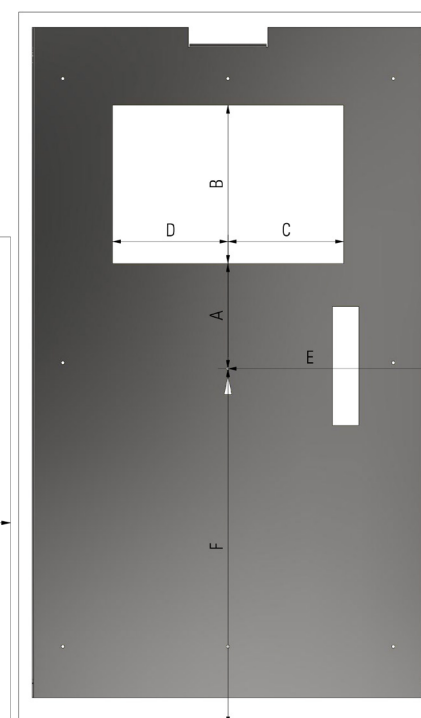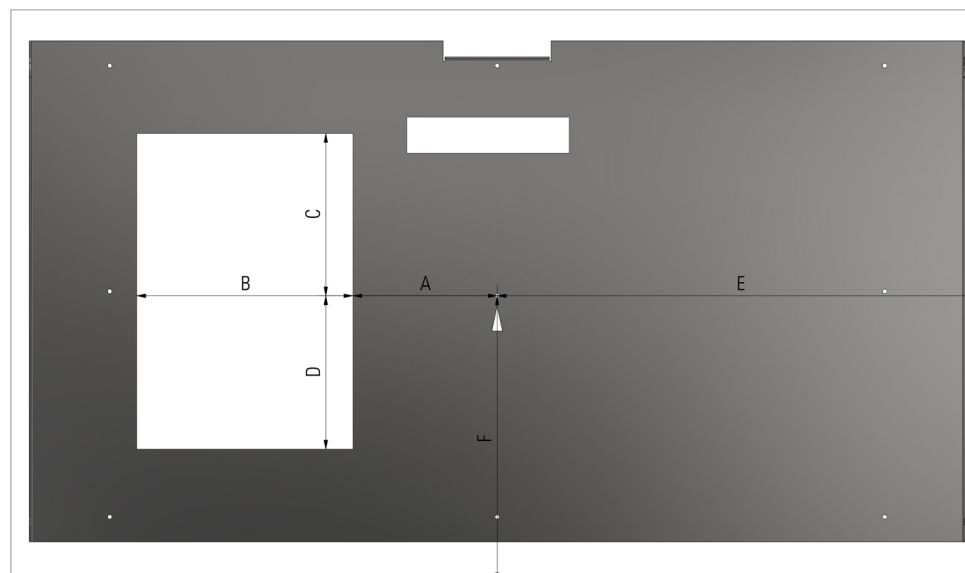

Monitor Außenmaße  
External dimensions

# BLO-Line® A1 Installationshinweise

BLO-Line® monitors 54.6"

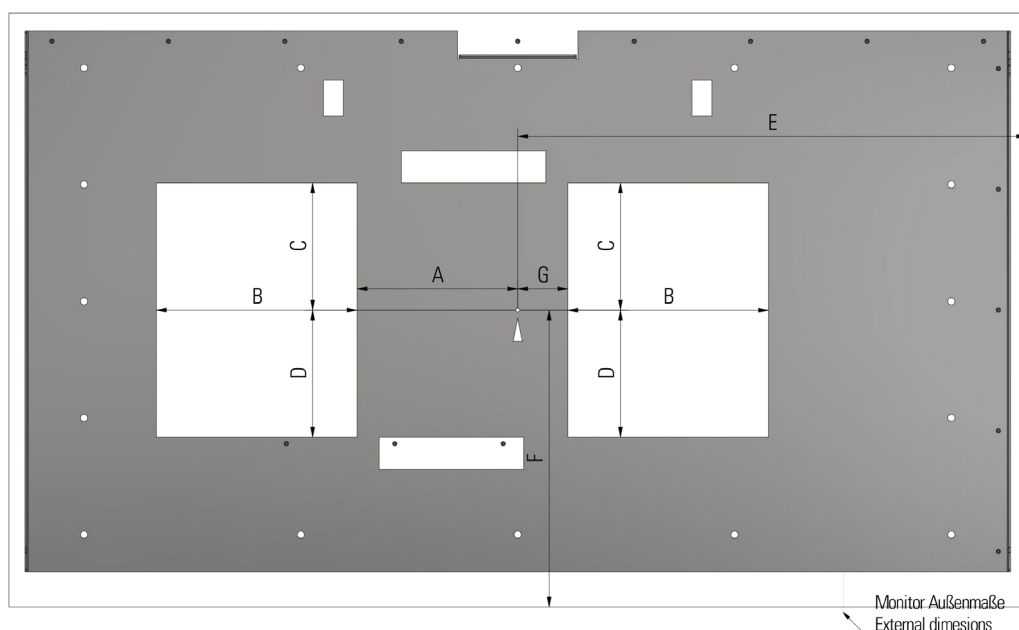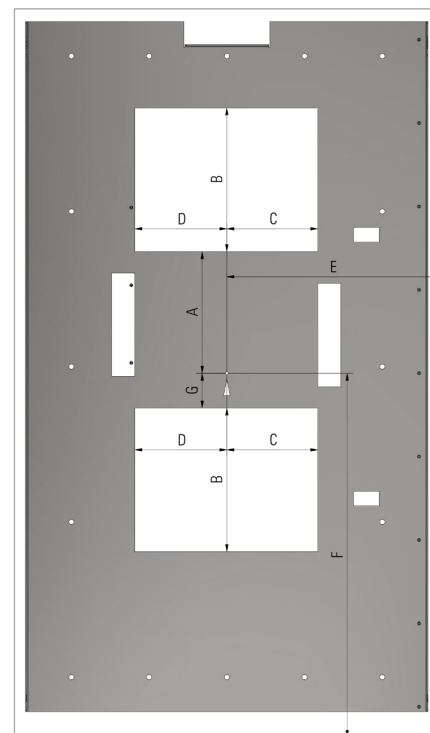

Monitor Außenmaße  
External dimensions

## FURTHER INFORMATION

[www.brandschutzmonitore.de](http://www.brandschutzmonitore.de)

Distec GmbH, Augsburgur Straße 2b, 82110 Germering  
Telefon: 03 69 20 71 62-0 E-Mail: [solution@distec.de](mailto:solution@distec.de)

Fördermitglied im

