



OUR GLOBAL  
COMPETENCE  
CENTRES

 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY




# Datasheet

## Advantech

### MIO-2363

**2,5" Single-Board Computer with Elkhart Lake Intel® Atom™ x6000E Series processor**

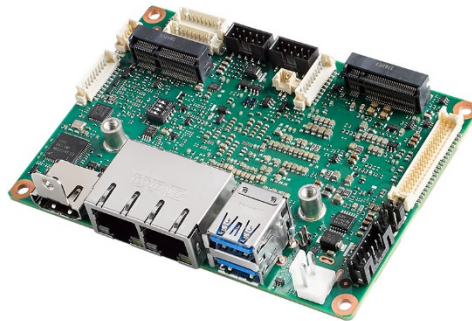

---


The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

# MIO-2363

## Intel® Atom® x6000 Series Processor (Code Name: Elkhart Lake) Pico-ITX SBC

NEW

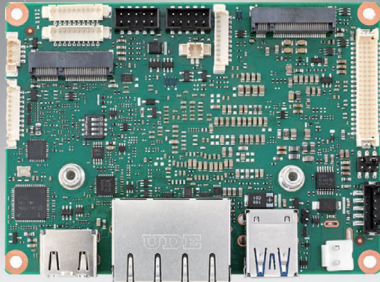

### Features

- Intel Atom x6000E Series
- Onboard LPDDR4x up to 8GB and EMMC up to 128GB
- Support 12~24V wide voltage range and -40~85°C operating temperature
- 2x GbE LAN, 2x USB3.2, 2x RS-232/422/485, I2C
- M.2 E-Key and B-Key for SATA storage, option to support RS-232 module
- Support iManager & Software APIs, WISE-DeviceOn, and EdgeAI Suite

#### Software APIs:




ubuntu yocto Windows10 iManager WISE-DeviceOn CE FC

### Specifications

Platform	Processor	x6211E	x6413E	x6425E
	Max. Frequency	3.0GHz	3.0GHz	3.0GHz
	Base Frequency	1.3GHz	1.5GHz	2.0GHz
	Core/Tread	2/2	4/4	4/4
	L2 Cache	1.5 MB	1.5 MB	1.5 MB
	CPU TDP	6W	9W	12W
	Chipset	Intel® Chipset (SoC Integrated)		
	BIOS	AMI UEFI 256Mbit		
Memory	Technology	LPDDR4x-3200	LPDDR4x-3200	LPDDR4x-3733
	Max. Capacity	4GB	4GB	8GB
	Channel/Socket	Dual Channels / Onboard		
	ECC Support	IBECC	IBECC	IBECC
Storage	eMMC	64GB	64GB	128GB
	Controller	Intel® UHD Graphics for 10th Gen Intel® Processors		
Graphics	Max. Frequency	750MHz	750MHz	750MHz
	Base Frequency	350MHz	500MHz	500MHz
	3D/HW Acceleration	DX12, OGL4.5, OCL1.2, Vulkan 1.1; HW encode HEVC/H.265, MPEG2, JPEG/MJPEG		
Display I/F	LCD	LVDS Dual Channel 18/24-bit LVDS		
	HDMI	Up to 2160 x 3840 @ 30Hz		
	Multiple Display	LVDS+HDMI		
	Controller	2 x RJ-45, LAN1: Intel i210, LAN2: Intel i210		
Ethernet	Speed	10/100/1000 Mbps		
	Ethernet	2 x RJ-45		
External I/O	VGA/HDMI/DP	-/1/-		
	USB3.2/USB2.0	2/-		
	Power DC-Jack	Optional		
	SATA	-		
Internal I/O	USB2.0	2		
	Serial Bus	1x I2C		
	COM Port	2 x RS-232/422/485		
	GPIO	8-bit general purpose input output I/O		
	Audio	Realtek ALC888, Line-in/Line-out/MIC		
	Inverter	12V/5V		
	LPC/SPI Bus	eSPI for EIO-211 / SPI for TPM / no LPC		
	Front Panel Control	Power-on, Reset, Buzzer, SATA LED, CaseOpen		
	Watchdog Timer	Programmable 1 - 65535 sec/min		
	TPM	TPM2.0 (Infineon SLB 9670)		
	iManager 3.0	SW API for Hardware Monitor, Smart Fan Control, Brightness Control, I2C, GPIO, WDT		
Expansion	M.2	1x M.2 E-Key for 2230 module (PCIex1, USB 2.0 to support wireless module) 1x M.2 B-Key for 2242 module (SATA, USB2.0 to support SATA storage, BOM option to PCIex1 to support PCIe storage or RS-232 module)		
	Supply Voltage	Vin: DC 12~24V +/- 10%; RTC Battery: Lithium 3V/210mAh		
Power	Connector	2pin Power Connector (180D); Optional: DC-IN Jack		
	Power Management	AT, ATX		
	Max. Consumption	22.30W (12V), 23.86W (24V)	27.40W (12V), 29.65W (24V)	27.86W (12V), 29.81W (24V)
	Idle Consumption	9.26W (12V), 11.21W (24V)	9.41W (12V), 11.90W (24V)	8.95W (12V), 11.37W (24V)
Environment	Temperature	Operating Standard: 0 - 60 °C (32 - 140 °F), Operating Extend: -40 - 85 °C (-40 - 185 °F) Storage: -40 - 85 °C (-40 - 185 °F)		
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95% relative humidity, non-condensing		
	Vibration Resistance	3.5 Grms		
Certification	EMC	CE, FCC Class B		
Mechanical	Dimensions	100 x 72 mm (3.9" x 2.8")		
	Net Weight	86g		

\*Note: xxxx

### Block Diagram

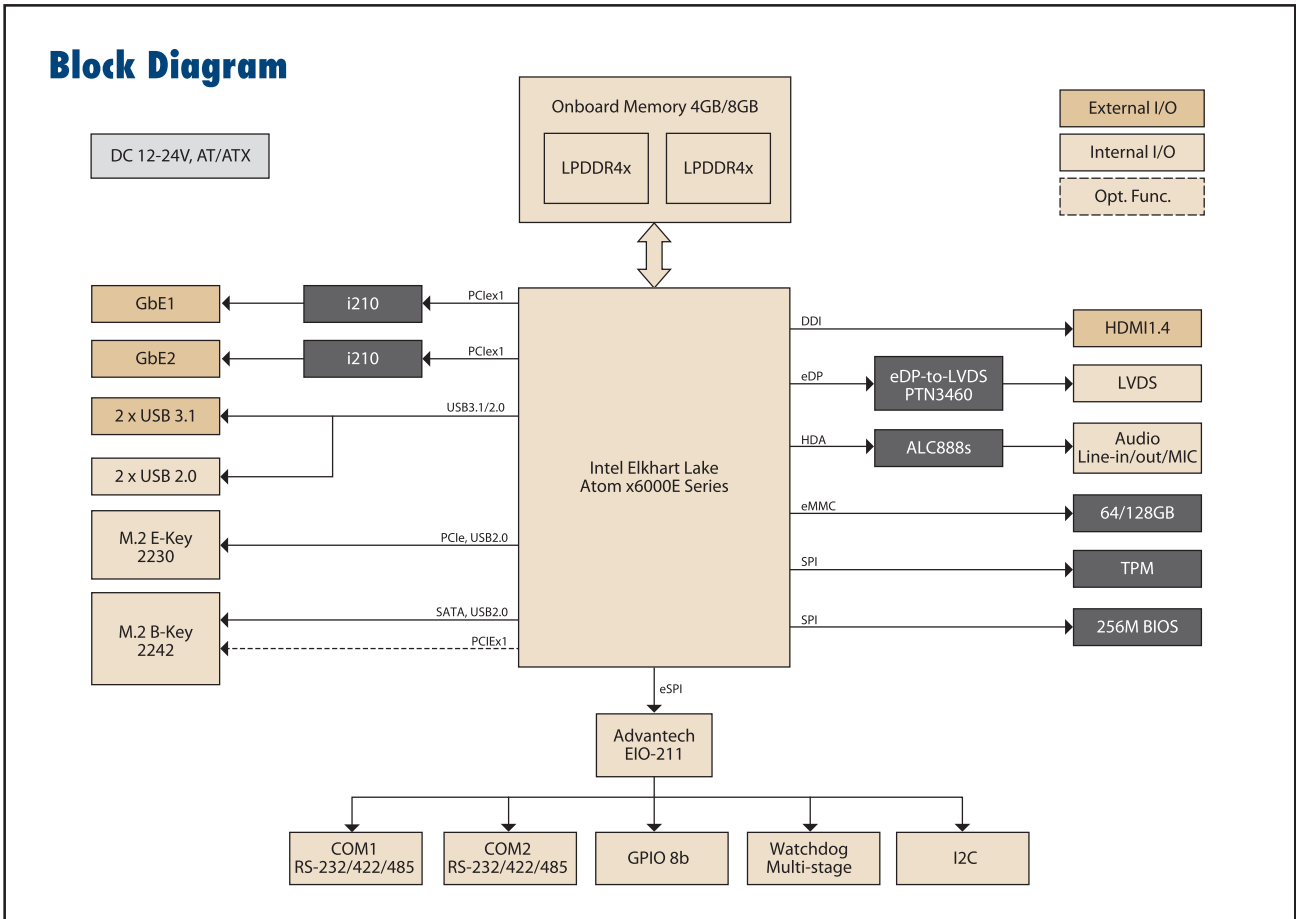

### Ordering Information

PN	CPU	Max Frequency	Core	Memory	eMMC	USB3.2	GbE	RS232/422/485	TPM2.0	Thermal Solution	Operating Temperature
MIO-2363AW-P1A1	x6211E	3.0GHz	2	4GB	64GB	2	2	2	Y	Passive	-40 ~ 85 °C
MIO-2363AW-P2A1	x6413E	3.0GHz	4	4GB	64GB	2	2	2	Y	Passive	-40 ~ 85 °C
MIO-2363AW-P3A1	x6425E	3.0GHz	4	8GB	128GB	2	2	2	Y	Passive	-40 ~ 85 °C

### Packing List

Part No.	Description	Quantity
	MIO-2363 SBC	1
2006236300	Startup Manual	1
1970005240T001	MIO-2363 Passive Heatsink	1
1700030406-01	USB cable (2 ports, 20cm)	1
1700030404-01	COM port cable (20cm)	2
1700019584-01	Audio cable (3 phone jacks, 20cm)	1
1700019705-01	ATX 2x2P power cable (20cm)	1

### Optional Accessories

Part No.	Description
1970005500N001	MIO-2363 heatspreader

### Embedded OS/API

OS	Part No.	Description
Win10	20706WX9ES0160	64-bit (UEFI mode only)
Ubuntu	20706U20DS0026	Ubuntu Desktop 20.04 LTS 64-bit Image & License Sticker for MIO-2363
Yocto BSP	Support by Request	Yocto BSP and Test Image
Software API	Website Download	SUSI v4.0


### Rear I/O View



# Reliable Embedded BIOS Solutions

Custom BIOS services with long-term support

Advantech's high-quality embedded BIOS solutions deliver rapid execution and feature expert BIOS team support. These solutions feature multi-functional designs that ensure security and enable power/boot management. Advantech further provides 10+ years of BIOS version management, internal management, and longevity support for both hardware and BIOS — enhancing application efficiency, diversifying functionality, and optimizing performance.

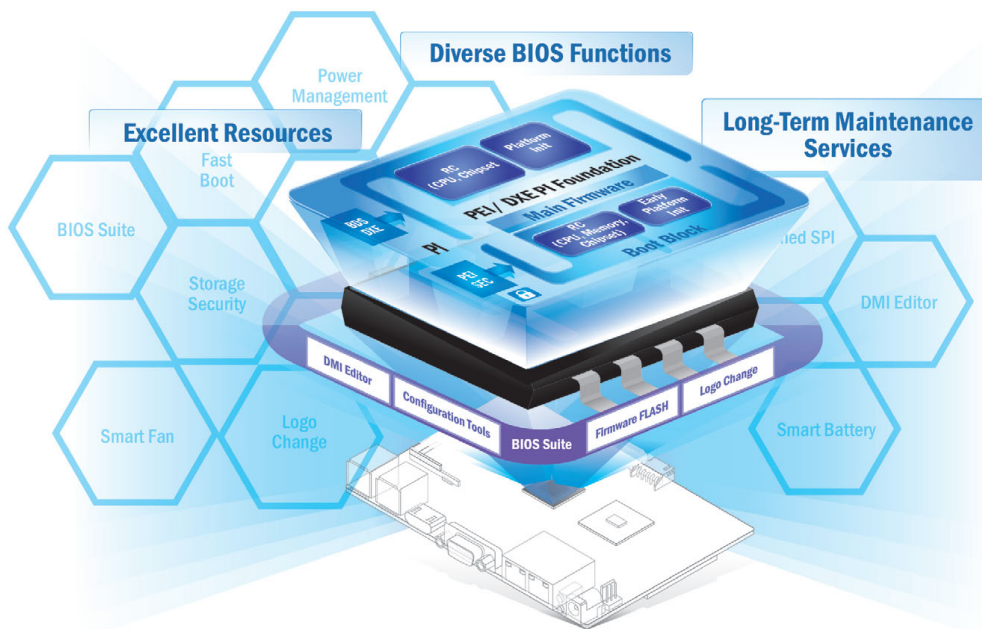

## Embedded BIOS Solution Advantages

### Sufficient Sources

- Strong partnership with BIOS vendors
- 50+ engineers with extensive industrial BIOS experience


### Diverse BIOS Functions

- Multi-layer security
- 3 second fast boot
- Power management
- BIOS suite utility

### Long-Term Maintenance Services

- Platform longevity support
- 10-year BIOS version control
- BIOS remote backup

## Value-Added Customization Process

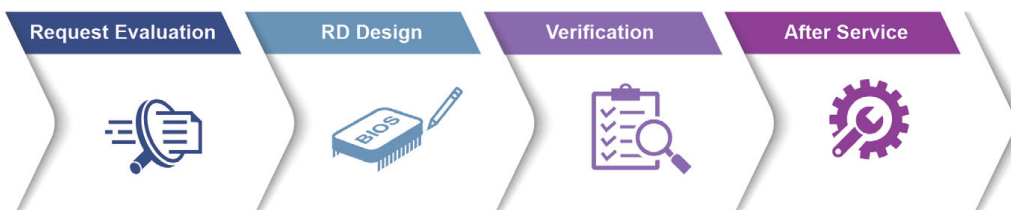

# Embedded Linux Support and Design-in Services

## Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.



### Features

Certified OS and BSP	Licensed Services	Numerous AI and Edge Resources	Local Partner Alliance
<ul style="list-style-type: none"> <li>Platform compatibility tests</li> <li>Preloaded functional driver and software stacks</li> </ul>	<ul style="list-style-type: none"> <li>License authorized Canonical delivers 10-years of bug fixes and security updates</li> <li>In-house bundled service</li> </ul>	<ul style="list-style-type: none"> <li>Containerized technology for service provision and deployment</li> <li>AI resources from Caffe, TensorFlow, and mxnet</li> </ul>	<ul style="list-style-type: none"> <li>Embedded Linux and Android Alliance (ELAA)</li> </ul>

# Edge AI Suite

AI development for diverse application at the Edge

Increasing demand for AI inference/analytic capabilities at the Edge make AI training models, software development environments, and hardware configuration key factors in successful solution deployment. Advantech's Edge AI Suite helps users build AI demo devices quickly and choose optimal hardware solutions easily.



5x Performance Boost	All-in-one Installation	One Click AI Experience	Plug-and-play Environment	Discover Cost-effective Hardware
<ul style="list-style-type: none"> <li>Integrated Intel® OpenVINO™ technology</li> <li>Boost AI using Advantech hardware</li> </ul>	<ul style="list-style-type: none"> <li>Build AI environment in under 5 minutes</li> <li>Ready-to-use configuration</li> </ul>	<ul style="list-style-type: none"> <li>User friendly configuration guidance</li> <li>One-click Benchmark acquisition</li> </ul>	<ul style="list-style-type: none"> <li>Easy access to 100+ AI inference extensions</li> <li>Software development package available</li> </ul>	<ul style="list-style-type: none"> <li>Diverse CPU/RAM options</li> <li>Find hardware solutions for AI development</li> </ul>

# WISE-DeviceOn

## Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



### Features

Comprehensive Management	Remote Access	Efficient Operations
<ul style="list-style-type: none"> <li>• Devices status</li> <li>• Peripherals/firmware</li> <li>• Open for extension</li> </ul>	<ul style="list-style-type: none"> <li>• Real-time monitoring</li> <li>• Remote controls</li> <li>• Troubleshooting</li> </ul>	<ul style="list-style-type: none"> <li>• Zero-touch on-boarding</li> <li>• OTA updates</li> <li>• Batch control</li> </ul>

### Product Highlights

 <p><b>SOM-6883</b> High-performance 11<sup>th</sup> Gen Intel® COMe Type 6 Module</p>	 <p><b>MIO-5375</b> Compact 11<sup>th</sup> Gen Intel® Outdoor Focused 3.5" SBC</p>	 <p><b>EPC-B5587</b> 10<sup>th</sup> Gen Intel® Xeon® based Edge server</p>	 <p><b>EPC-R3220</b> Arm based IoT Edge Gateway</p>
---	--	--	--



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



#### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894450-0  
E-Mail: [info@fortecaq.de](mailto:info@fortecaq.de)  
Internet: [www.fortecaq.de](http://www.fortecaq.de)

## Fortec Group Members

### Austria



#### Distec GmbH Office Vienna

Nuschinggasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Germany



#### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Switzerland



#### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



#### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hichingbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



#### Apollo Display Technologies, Corp.

87 Raynor Avenue,  
Unit 1 Ronkonkoma,  
NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)