



OUR GLOBAL  
COMPETENCE  
CENTRES

 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY




# Datasheet

## ADVANTECH

### MIO-5350

**3,5" Single-Board Computer with Intel® Atom™ Apollo Lake  
Pentium® N4200, Celeron® N3350 and Atom™ E39xx Processor,  
1x 48-bit LVDS/eDP\*, 1x HDMI/DP\*, COMs, up to -40°..+85°C**

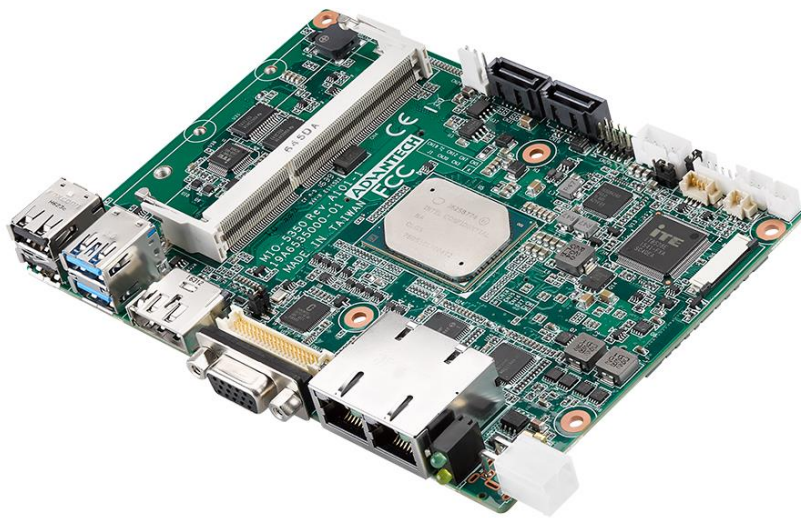

---


The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

# MIO-5350

## Intel® Pentium N4200 Celeron N3350 & Atom™ E3950/E3940/E3930, 3.5" SBC w/ MIOe

**NEW**

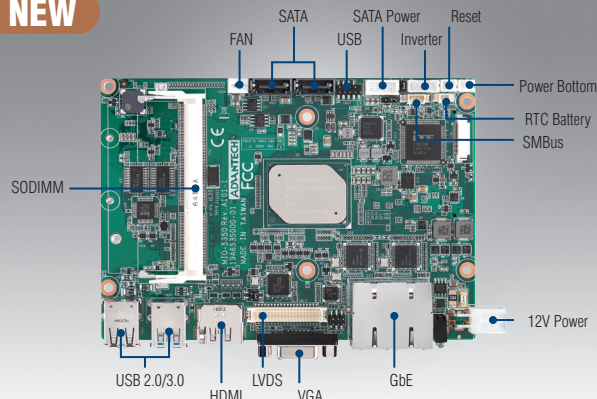

### Features

- Intel® Pentium N4200 & Celeron N3350, Atom™ E3950, E3940, E3930, DDR3L 1866MHz, up to 8GB
- Triple display: VGA+LVDS/eDP\*+ HDMI/DP\*
- 2 Intel i210 GbE, rich I/O: 4COM, 2 SATA, 2 USB 3.0, SMBus/I<sup>2</sup>C, GPIO M.2 E Key, full-size mSATA, MIOe
- Supports iManager & Software APIs, WISE-DeviceOn

#### Software APIs:



#### Utilities:




iManager WISE-PaaS/RMM CE FCC

### Specifications

		Intel Pentium 4200	Intel Celeron N3350	Intel Atom E3950	Intel Atom E3940	Intel Atom E3930
Processor System	CPU	Intel Pentium 4200	Intel Celeron N3350	Intel Atom E3950	Intel Atom E3940	Intel Atom E3930
	Base Frequency	1.1 (Quad-Core)	1.1 (Dual-Core)	1.6 (Quad-Core)	1.6 (Quad-Core)	1.3 (Dual-Core)
	Burst Frequency	2.5	2.4	2	1.8	1.8
	L2 Cache	2	2	2	2	2
Memory	BIOS	AMI UEFI BIOS at 64 Mb				
	Technology	DDR3L 1866MHz				
Display	Max. Capacity	8 GB				
	Socket	1 x 204-pin SODIMM				
	Controller	Intel Gen9 Graphic engine				
	Graphic Features	DirectX 12.0, OpenGL 4.3, OpenCL 2.0 HW Decode: H.264, MPEG2, VC-1, WMV9, H.265/HEVC, VP8, JPEG/MJPEG				
	VGA	Maximum Resolution up to 1920 x 1200				
	LVDS	48 bit LVDS up to 1.4b (3840 x 2160 @ 30Hz) Supports 3.3/5/12V for VDD power, 5/12V for inverter				
	eDP*	v1.4 4096 x 2160 @ 60Hz				
Ethernet	HDMI / DP*	HDMI 3840 x 2160 @ 30Hz/ DP1.2a (4096 x 2160 @ 60Hz)				
	Multit-Display	VGA, HDMI/DP*, LVDS/eDP*				
	Speed	10/100/1000Mbps				
Audio	Controller	Intel i210				
	Connector	2 RJ45				
WatchDog Timer	Codec	Realtek ALC888S, High Definition Audio (HD), Line-in, Line out, Mic-in				
	Amplifier*	Optional via MIOe				
Storage	Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds					
	SATA	2 (2nd SATA is by request), up to 6 Gb/s				
Rear I/O	mSATA	1 x Full-size				
	Ethernet	2 (10/100/1000Mbps)				
	VGA	1				
	HDMI / DisplayPort*	1				
	USB 2.0	2				
	USB 3.0	2				
	LED	Power, HDD				
Internal I/O	DC Jack*	1				
	Serial	2 x RS-232 from COM1/2, 2 x RS-232/422/485 from COM3/4 with auto flow control (ESD protection: air gap ±15kV, contact ±8kV)				
	USB 2.0	2				
	I <sup>2</sup> C	1 (Shared with SMBus pin)				
Security	SMBus	1				
	GPIO	8-bit (5V tolerance)				
Expansion	TPM2.0*	Support by request				
	Mini PCIe	M.2 E Key				
Power	MIOe	SMBus, 3 x USB2.0, LPC, 1 x PCIe x1, line out, DisplayPort*, +5 Vsb/+12 Vsb power, Power On, Rest				
	Power Type	Single 12V DC power input				
	Power Supply Voltage	12V ± 10%				
	Power Consumption (Typical)	N4200: 0.4A @ 12V (4.80W) N3350: 0.4A @ 12V (4.80W)				
	Power Consumption (Max, test in HCT)	N4200: 1.26A @ 12V (15.12W) N3350: 1.29 @ 12V (15.48W)				
	Power Management	ACPI				
Environment	Battery	Lithium 3 V / 210 mAh				
	Operating: Standard	0 ~ 60 °C (32 ~ 140 °F), Extend: -40 ~ 85 °C (-40 ~ 185 °F)				
Physical Characteristics	Operating humidity	40 °C @ 95% RH Non-Condensing				
	Dimensions (L x W)	146 x 102 mm (5.7" x 4"), same as 3.5"				
	Weight	0.5kg (1.1lb), weight of total package				
	Height	Top Side: 19 mm; Bottom Side: 6.8 mm; PCB: 1.6 mm				

\* This specification is supported by request

### Block Diagram

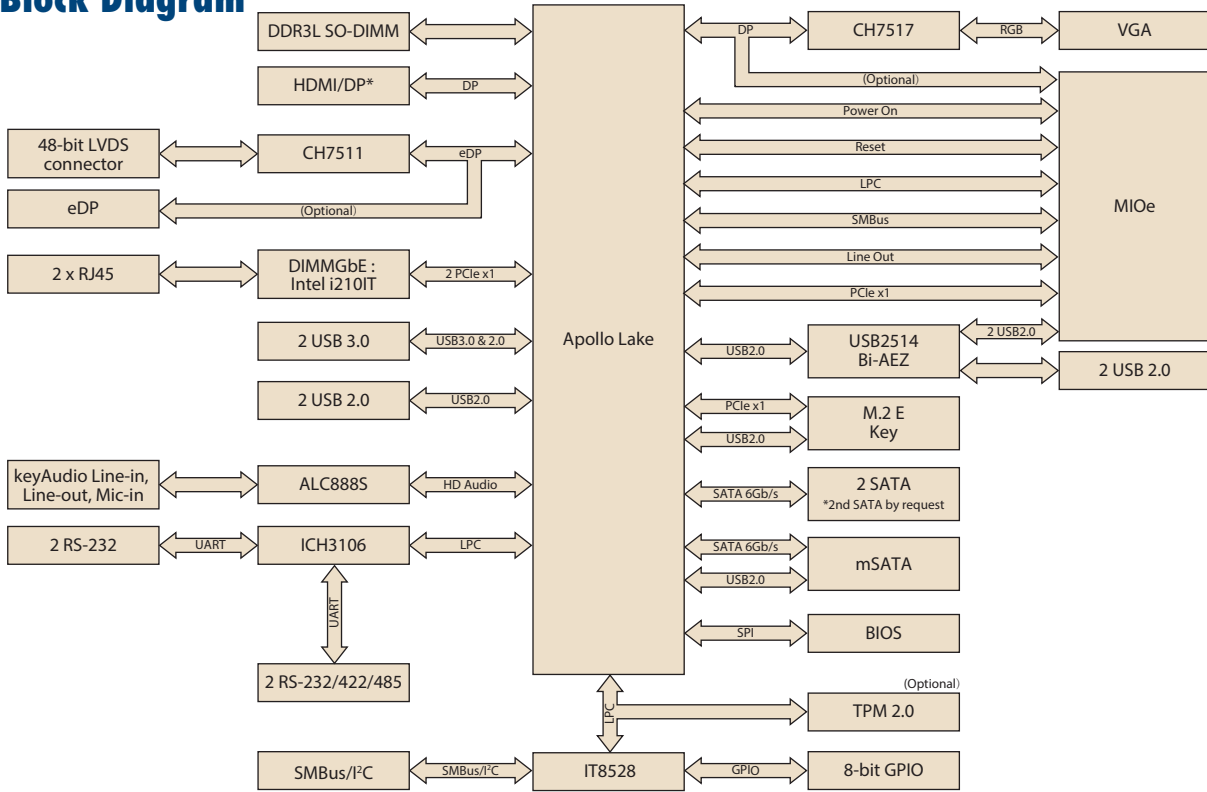

### Ordering Information

Part No.	CPU	L2 Cache	Memory	LVDS/eDP*	VGA	HDMI/DP*	GbE	Audio	RS-232/422/485	RS-232	USB 3.0	USB 2.0	SATA III	Msata	MIOe	Power Connector	Thermal solution	Operating Temp
MIO-5350N-S2A2	Intel Pentium N4200	2MB	SODIMM	48-bit	1	1/0	2	Yes	2	2	2	4	1	Full-size	Yes	2x2pin	Passive	0-60°C
MIO-5350N-S1A2	Intel Celeron N3350	2MB	SODIMM	48Bit	1	1/0	2	Yes	2	2	2	4	1	Full-size	Yes	2x2pin	Passive	0-60°C
MIO-5350EW-S7A2	Intel Atom E3950	2MB	SODIMM	48-bit	1	1/0	2	Yes	2	2	2	4	1	Full-size	Yes	2x2pin	Passive	-40-85°C
MIO-5350EW-S6A2	Intel Atom E3940	2MB	SODIMM	48-bit	1	1/0	2	Yes	2	2	2	4	1	Full-size	Yes	2x2pin	Passive	-40-85°C
MIO-5350EW-S3A2	Intel Atom E3930	2MB	SODIMM	48-bit	1	1/0	2	Yes	2	2	2	4	1	Full-size	Yes	2x2pin	Passive	-40-85°C

Note: passive=fanless

### Packing List

Part No.	Description	Quantity
	MIO-5350 SBC	1
2006535000	Startup Manual	1
1960078474T011	MIO-5350 Heatsink for N3350/ N4200	1
1970004560T001	MIO-5350 Heatsink for E39XX series	1
1700006291	M Cable SATA 7P/SATA 7P 30cm C=R 180/90	1
1700018785	SATA 35cm power cable	1
1701200220	COM RS-232 Cable 2*10P-2.0/D-SUB 9P (M)*2 22CM	2
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm mini Jumper pack	1

### Optional Accessories

Part No.	Description
96PSA-A60W12R1-3	ADP A/D 100-240V 60W 12V C14 DC PLUG 90°
1703100264	Internal 1 port USB cable 22.5cm
1960084261N001	MIO-5350 Heatspreader for N3350/ N4200
1960084261N011	MIO-5350 Heatspreader for E39XX

### Embedded OS/API

Embedded OS/API	Part No.	Description
Win10	2070015276	64bit (ENG)
Linux		Ubuntu 14.04
VxWorks		6.9.3.3
Android		Kit Kat 4.4
Software API		iManager 2.0

### Rear I/O View



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894450-0  
E-Mail: [info@fortecaq.de](mailto:info@fortecaq.de)  
Internet: [www.fortecaq.de](http://www.fortecaq.de)

---

## Fortec Group Members

### Austria



### Distec GmbH Office Vienna

Nuschinggasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Germany



### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Switzerland



### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hinchingsbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



### Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1  
Ronkonkoma, NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)