



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY




Release Notes

Distec

Artista-IoT Raspbian

Industrial ARM Platform based on Raspberry Pi CM3

PA-36-XXX

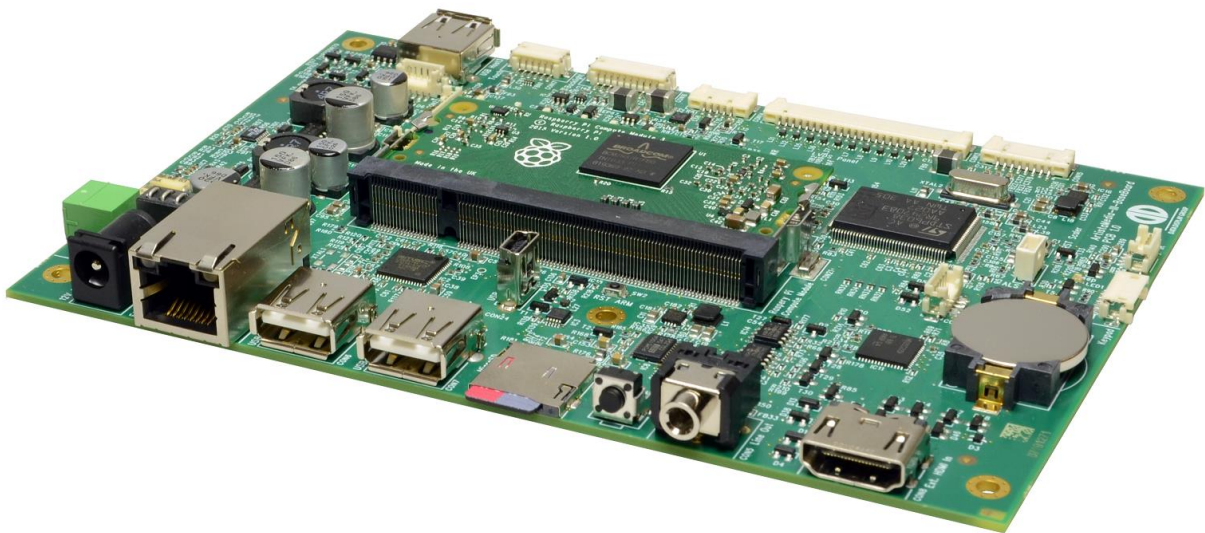

Version 3.3.1

27.09.2017

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

Table of Contents

1	Revision History	4
2	Firmware Release History	4
2.1	Firmware version: 20170426_Goodix	4
2.2	Firmware version: 1.0.0	5
2.3	Firmware version: 2.0.0	6
2.4	Firmware version: 3.0.0	7
2.5	Firmware version: 3.2.0	8
2.6	Firmware version: 3.3.1 – EETI EXC3000 I ² C PCAP Touch.....	9
3	Known Issues of latest Firmware Version.....	9
3.1	Currently no Known Issues.....	9

1 Revision History

Date	Version	Description	Page
20.07.2017	3.0.0	Artista-IoT firmware version 3.0.0 and all previous versions	All
26.09.2017	3.2.0	Added info about Artista-IoT firmware version 3.2.0	7
27.09.2017	3.3.1	Added info about Artista-IoT firmware version 3.3.1 with support for EETI EXC3000 I2C PCAP Touch	8

2 Firmware Release History

This section lists all Artista-IoT firmware releases.

2.1 Firmware version: 20170426_Goodix

Exact firmware version: 20170426_Goodix
Release date: 26.04.2017

Name of archive file containing Artista-IoT firmware image:

- Compute Module: CM_Artista-IoT_Main_Goodix_2017-04-10-raspbian-jessie_20170426.7z
- SD Card: SD_Artista-IoT_Main_Goodix_2017-04-10-raspbian-jessie_20170426.7z

It can be installed on board configuration:

- PA-36-XXX Artista-IoT

Based on:

- Name: Raspbian Jessie with PIXEL
- Version: April 2017
- Image: 2017-04-10-raspbian-jessie.zip
- Download: <http://downloads.raspberrypi.org/raspbian/images/raspbian-2017-04-10/>

Notes:

- This is the initial firmware release for Artista-IoT
- The original Raspbian kernel has been replaced by a custom kernel version to support the Goodix I²C touch screen of the Artista-IoT Starter Kit
- The original Raspbian image is too large to be installed into the on-board eMMC flash memory device on the Raspberry Compute Module. Thus the installation has been split into two parts. The boot partition is located in the Compute Module eMMC and the root file system is located on the external SD card

2.2 Firmware version: 1.0.0

Exact firmware version: 1.0.0.55052
Release date: 03.05.2017

Name of archive file containing Artista-IoT firmware image:

- Compute Module: CM_Artista-IoT_Raspbian_v1.0.0.55052.7z
- SD Card: SD_Artista-IoT_Raspbian_v1.0.0.55052.7z

It can be installed on board configuration:

- PA-36-XXX Artista-IoT

Based on:

- Name: Raspbian Jessie with PIXEL
- Version: April 2017
- Image: 2017-04-10-raspbian-jessie.zip
- Download: <http://downloads.raspberrypi.org/raspbian/images/raspbian-2017-04-10/>

Changes:

- Raspbian uses the limited color range (16..235) for HDMI out for displays with 16:9 aspect ratio. Since the display controller on the ArtistaMedia-III Base Board expects full color range (0..255) at its HDMI input, there was a mismatch. Added the setting "hdmi_pixel_encoding=2" to the "config.txt" file to hard-code the Raspberry Pi to full color range (0..255) at HDMI out for all modes and display resolutions

2.3 Firmware version: 2.0.0

Exact firmware version: 2.0.0.55315
Release date: 06.06.2017

Name of archive file containing Artista-IoT firmware image:

- Compute Module: CM_Artista-IoT_Raspbian_v2.0.0.55315.7z
- SD Card: -

It can be installed on board configuration:

- PA-36-XXX Artista-IoT

Based on:

- Name: Raspbian Jessie with PIXEL
- Version: April 2017
- Image: 2017-04-10-raspbian-jessie.zip
- Download: <http://downloads.raspberrypi.org/raspbian/images/raspbian-2017-04-10/>

Changes:

- With firmware version 1.0.0 the size of the resulting image was larger than 4 GiB. Because of this it was not possible to install it completely into the flash memory of Raspberry Compute Module 3. Thus the original Raspbian image was split into two parts, where the "CM_*.img" was installed on the Compute Module 3 and "SD_*.img" was installed on the microSD card. To improve this, the following applications coming with the original Raspbian image have been uninstalled:
 - Wolfram Mathematica
 - Squeak (Smalltalk)
 - Supercollider, Scratch and Sonic
 - Minecraft

This results in a firmware image with a size of 3 GiB which can be installed on the internal flash memory of Compute Module 3 completely. The SD card is not required for the firmware anymore and can be used as memory extension

- Added the file "/etc/Artista-IoT-Version" which keeps the current Artista-IoT firmware version
- Added support for the EETI eGalaxTouch USB resistive touch controller. The calibration tool can be found in the "Other" program menu

2.4 Firmware version: 3.0.0

Exact firmware version: 3.0.0.55952
Release date: 20.07.2017

Name of archive file containing Artista-IoT firmware image:

- Compute Module: CM_Artista-IoT_Raspbian_v3.0.0.55952.7z
- SD Card: -

It can be installed on board configuration:

- PA-36-XXX Artista-IoT

Based on:

- Name: Raspbian Jessie with PIXEL
- Version: July 2017
- Image: 2017-07-05-raspbian-jessie.zip
- Download: <http://downloads.raspberrypi.org/raspbian/images/raspbian-2017-07-05/>

Changes:

- Updated the Raspbian base image from version "2017-04-10" to version "2017-07-05". This brings a kernel upgrade from version 4.4 to 4.9. For a detailed list of changes, please refer to the Raspbian release notes: http://downloads.raspberrypi.org/raspbian/release_notes.txt
- The new Raspbian kernel version 4.9 brings native support for the Goodix I²C touch screen used with the Artista-IoT Starter Kit. To enable it, the following lines have been added to the "config.txt" file:
Enable Goodix gt9271 touchscreen on "Touch" connector:
dtoverlay=goodix,interrupt=34,reset=35
- Due to the new kernel version mentioned above, the customized kernel with Goodix support is not required any more. The original Raspbian kernel is now used

2.5 Firmware version: 3.2.0

Exact firmware version: 3.2.0.56724
Release date: 26.09.2017

Name of archive file containing Artista-IoT firmware image:

- Compute Module: CM_Artista-IoT_Raspbian_v3.2.0.56724.7z
- SD Card: -

It can be installed on board configuration:

- PA-36-XXX Artista-IoT

Based on:

- Name: Raspbian Stretch with DESKTOP
- Version: September 2017
- Image: 2017-09-07-raspbian-stretch.zip
- Download: <http://downloads.raspberrypi.org/raspbian/images/raspbian-2017-09-08/>

Changes:

- Updated the Raspbian base image from version "2017-07-05" to version "2017-09-07". This brings an upgrade from Raspbian Jessie (based on Debian 8) to Raspbian Stretch (Debian 9). For a detailed list of changes, please refer to the Raspbian release notes: http://downloads.raspberrypi.org/raspbian/release_notes.txt
- Removed "LibreOffice" from the installation to save disk space in the Compute Module eMMC flash memory

2.6 Firmware version: 3.3.1 – EETI EXC3000 I²C PCAP Touch

Exact firmware version: 3.3.1.56811
Release date: 27.09.2017

Name of archive file containing Artista-IoT firmware image:

- Compute Module: CM_Artista-IoT_Raspbian_v3.3.1.56811_EETI_EXC3000_I2C.7z
- SD Card: -

It can be installed on board configuration:

- PA-36-XXX Artista-IoT

Based on:

- Name: Raspbian Stretch with DESKTOP
- Version: September 2017
- Image: 2017-09-07-raspbian-stretch.zip
- Download: <http://downloads.raspberrypi.org/raspbian/images/raspbian-2017-09-08/>

Changes:

- This firmware is based on the standard Artista-IoT Raspbian firmware version 3.2.0.56724 and has been customized to support the EETI EXC3000 I²C PCAP touch controller:
 - Disabled the support for the Goodix I²C touch controller used with the Artista-IoT Starter Kits by removing the following entry from the “config.txt” file:
Enable Goodix gt9271 touchscreen on "Touch" connector:
dtoverlay=goodix,interrupt=34,reset=35
 - Removed the calibration tool for the EETI eGalaxTouch USB resistive touch controllers
 - Replaced the standard by a customized Raspbian kernel and device tree with support for the EETI EXC3000 I²C touch controller
 - Added the following entries to the “config.txt” file to enable the EXC3000 touch controller, set the I²C bus frequency of the board from 100kHz (default) to 400 kHz and use the custom kernel and device tree:
Enable EETI EXC3000 touchscreen on "Touch" connector:
dtoverlay=exc3000,interrupt=34

Set I2C1 baudrate to 400KHz
dtparam=i2c1_baudrate=400000

Force to boot our kernel with EXC3000 support:
kernel=ddkernel.img

Force to use our device tree:
device_tree=devtree.dtb

3 Known Issues of latest Firmware Version

This section lists all known issues of the latest Artista-IoT firmware version.

3.1 Currently no Known Issues

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG
Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG
Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com