

















# **Datasheet**

# **Ortustech**

COM35H3R12ULC

OR-20-052

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

Customer's Approval

Issue:Sep.4,2023

# **Specifications for**

# **Blanview TFT-LCD Monitor**

(3.5\*" VGA 480 x RGB x 640 Portrait)

Version 1.0

(Please be sure to check the specifications latest version.)

MODEL COM35H3R12ULC

Signature :	
Name :	
Section :	
Title:	
Date :	
ORTUSTECH	1
	TOPPAN INC. Electronics Division Technological Development Department III
	Approved by Epuchi
	Checked by  J. Matsumaki
	Prepared by

Issue:Sep.4,2023

# Version History

Ver.	Date	Page	Description		
0.0	Oct.5,2022	-	-	Tentative issue	
1.0	Sep.4,2023	_	-	First issue	
٨		P.1		Cover	
<u>∕</u> A\ <sub>×6</sub>			Change	Department name	
		P.11		5. Block Diagram	
			Correct	Error correct	
		P.12		6. Absolute Maximum Rating	
			Correct	Condition	
		P.13		8.1 DC Characteristics	
			Change	Operating current	
		P.22		11.1 Defective Display and Screen Quality	
			Add	Signal conditioin	
			Correct	Notation	
		P.24		12. Reliability Test	
			Add	number of failures / number of examinations	
			Add	Applied voltage (Surface discharge test)	
		<u>,                                    </u>			

# Contents

1.	Appl	ication	• • • • • • • • • • • • • • • • • • • •	4	
2.	Outli	ne Specifications			
	2.1	Features of the Produc	t	• • • • • • • • • • • • • • • • • • • •	5
	2.2	Display Method		• • • • • • • • •	5
3.	Dime	ensions and Shape			
	3.1	Dimensions		• • • • • • • • •	7
	3.2	Outward Form		• • • • • • • • •	8
	3.3	Serial № print (S-print)		• • • • • • • • • • • • • • • • • • • •	9
4.	Pin /	Assignment		• • • • • • • • • • • • • • • • • • • •	10
5.	Bloc	k Diagram		• • • • • • • • •	11
6.	Abso	olute Maximum Rating		• • • • • • • • •	12
7.	Rec	ommended Operating C	onditions	• • • • • • • • •	12
8.	Elec	trical Characteristics			
	8.1	DC Characteristics		• • • • • • • • •	13
	8.2	AC Characteristics		• • • • • • • • • • • • • • • • • • • •	14
	8.3	Input Timing Character	ristics	• • • • • • • • • • • • • • • • • • • •	16
	8.4	<b>Driving Timing Chart</b>		• • • • • • • • • • • • • • • • • • • •	17
	8.5	<b>Example of Driving Tin</b>	ning Chart	• • • • • • • • • • • • • • • • • • • •	18
9.	Pov	er ON/OFF sequence		• • • • • • • • • • • • • • • • • • • •	19
10.	Cha	acteristics			
	10.1	<b>Optical Characteristics</b>		• • • • • • • • •	20
	10.2	Temperature Characte	ristics	• • • • • • • • •	21
11.	Crite	ria of Judgment			
	11.1	Defective Display and	Screen Quality	• • • • • • • • • • • • • • • • • • • •	22
	11.2	Screen and Other App	earance	• • • • • • • • • • • • • • • • • • • •	23
12.	Relia	ability Test		• • • • • • • • • • • • • • • • • • • •	24
13.	Pack	ing Specifications		• • • • • • • • • • • • • • • • • • • •	26
14.	Han	dling Instruction			
	14.1	Cautions for Handling	LCD panels	• • • • • • • • • • • • • • • • • • • •	27
	14.2	Precautions for Handlin	ng	• • • • • • • • • • • • • • • • • • • •	28
	14.3	Precautions for Operat	ion	• • • • • • • • • • • • • • • • • • • •	28
	14.4	Storage Condition for S	Shipping Cartons	• • • • • • • • • •	29
	14.5	Precautions for Peeling	g off		
			Protective film	• • • • • • • • • •	30
	14.6	Warranty		•••••	30
ΑI	PPEN	IDIX			31

## 1. Application

This Specification is applicable to 88.8 mm ( 3.5 inch ) Blanview TFT-LCD monitor for non-military use.


- TOPPAN makes no warranty or assume no liability that use of this Product and/or any information including drawings in this Specification by Purchaser is not infringing any patent or other intellectual property rights owned by third parties, and TOPPAN shall not grant to Purchaser any right to use any patent or other intellectual property rights owned by third parties. Since this Specification contains TOPPAN's confidential information and copy right, Purchaser shall use them with high degree of care to prevent any unauthorized use, disclosure, duplication, publication or dissemination of TOPPAN's confidential information and copy right.
- If Purchaser intends to use this Products for an application which requires higher level of reliability
   and/or safety in functionality and/or accuracy such as transport equipment (aircraft, train, automobile, etc.),
   disaster-prevention/security equipment or various safety equipment,
   Purchaser shall consult TOPPAN on such use in advance.
- This Product shall not be used for application which requires extremely higher level of reliability and/or safety such as aerospace equipment, telecommunication equipment for trunk lines, control equipment for nuclear facilities or life-support medical equipment.
- It must be noted as an mechanical design manner, especial attention in housing design to prevent arcuation/flexure caused by stress to the LCD module shall be considered.
- TOPPAN assumes no liability for any damage resulting from misuse, abuse, and/or miss-operation of the Product deviating from the operating conditions and precautions described in the Specification.
- It shall be mutually conferred if nonconforming defect which result from unspecified cause in this specification arises.
- If any issue arises as to information provided in this Specification or any other information, TOPPAN and Purchaser shall discuss them in good faith and seek solution.
- TOPPAN assumes no liability for defects such as electrostatic discharge failure occurred during peeling off the protective film or Purchaser's assembly process.

Object substance	Maximum content [ppm]
Cadmium and its compound	100
Hexavalent Chromium Compound	1000
Lead & Lead compound	1000
Mercury & Mercury compound	1000
Polybrominated biphenyl series (PBB series)	1000
Polybrominated biphenyl ether series (PBDE series)	1000
Bis(2-ethylhexyl)phthalate series(DEHP series)	1000
Butyl benzyl phthalate series(BBP series)	1000
Dibutyl phthalate series(DBP series)	1000
Diisobutyl phthalate series(DIBP series)	1000

## 2. Outline Specifications


## 2.1 Features of the Product

- 3.5 inch diagonal display, 1440 [H] x 640 [V] dots.
- 6-bit / 262,144 colors.
- Timing generator [TG], Counter-electrode driving circuitry, Built-in power supply circuit.
- Power save (Standby) mode capable.
- Long life & High bright white LED back-light.
- Blanview TFT-LCD, improved outdoor readability.

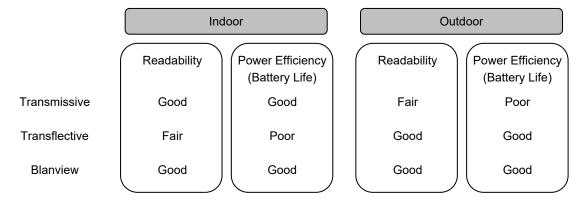

## 2.2 Display Method


Items Specifications		Remarks
Display type	VA , 262,144 colors.	
	Blanview, Normally black.	
Driving method		
	Line-scanning, Non-interlace.	
Dot arrangement	RGB stripe arrangement.	Refer to "Dot arrangement"
Signal input method	6-bit RGB,parallel input.	
Backlight type Long life & High bright white LED.		
NTSC ratio	50%	

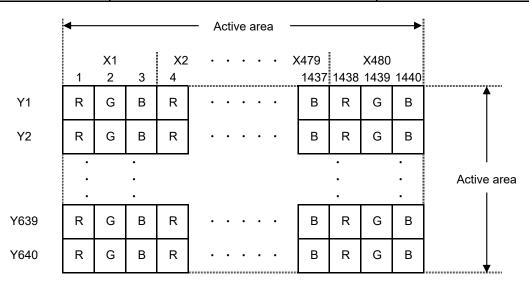

Dot arrangement (FPC cable placed leftside)


## <Features of Blanview>

- Backlight power consumption required to assure visibility. (equivalent to 3.5"QVGA)

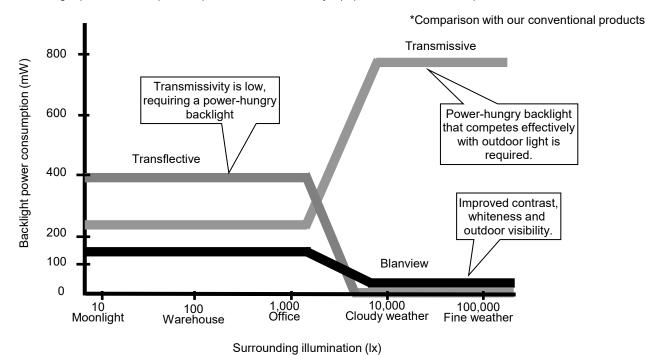

Contrast characteristics under 100,000lx. (same condition as direct sunlight.)
 With better contrast (higher contrast ratio), Blanview TFT-LCD has the best outdoor readability in three different types of TFT-LCD.

Below chart shows contrast value against panel surface brightness. (Horizontal: Panel surface brightness/ Vertical: Contrast value) LCD panel has enough outdoor readability above our Standard line. (TOPPAN criteria)

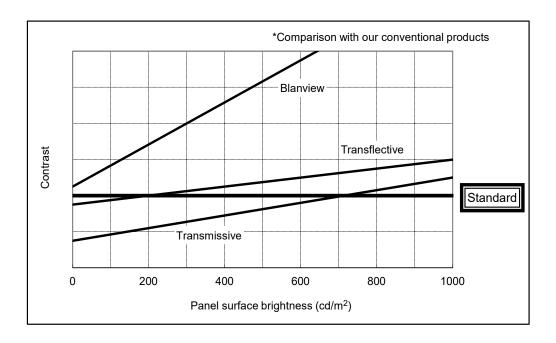


Issue:Sep.4,2023

# 3. Dimensions and Shape

# 3.1 Dimensions

Items	Specifications	Unit	Remarks
Outline dimensions	63.50[H] × 85.00[V] ×3.03[D]	mm	Exclude FPC cable and
			parts on FPC.
Active area	53.28[H] × 71.04[V]	mm	88.8 mm diagonal
Number of dots	1440[H] × 640[V]	dot	
Dot pitch	37.00[H] × 111.00[V]	μm	
Surface hardness of the polarizer	3	Н	Load:2.0N
Weight	30.8	g	Include FPC cable

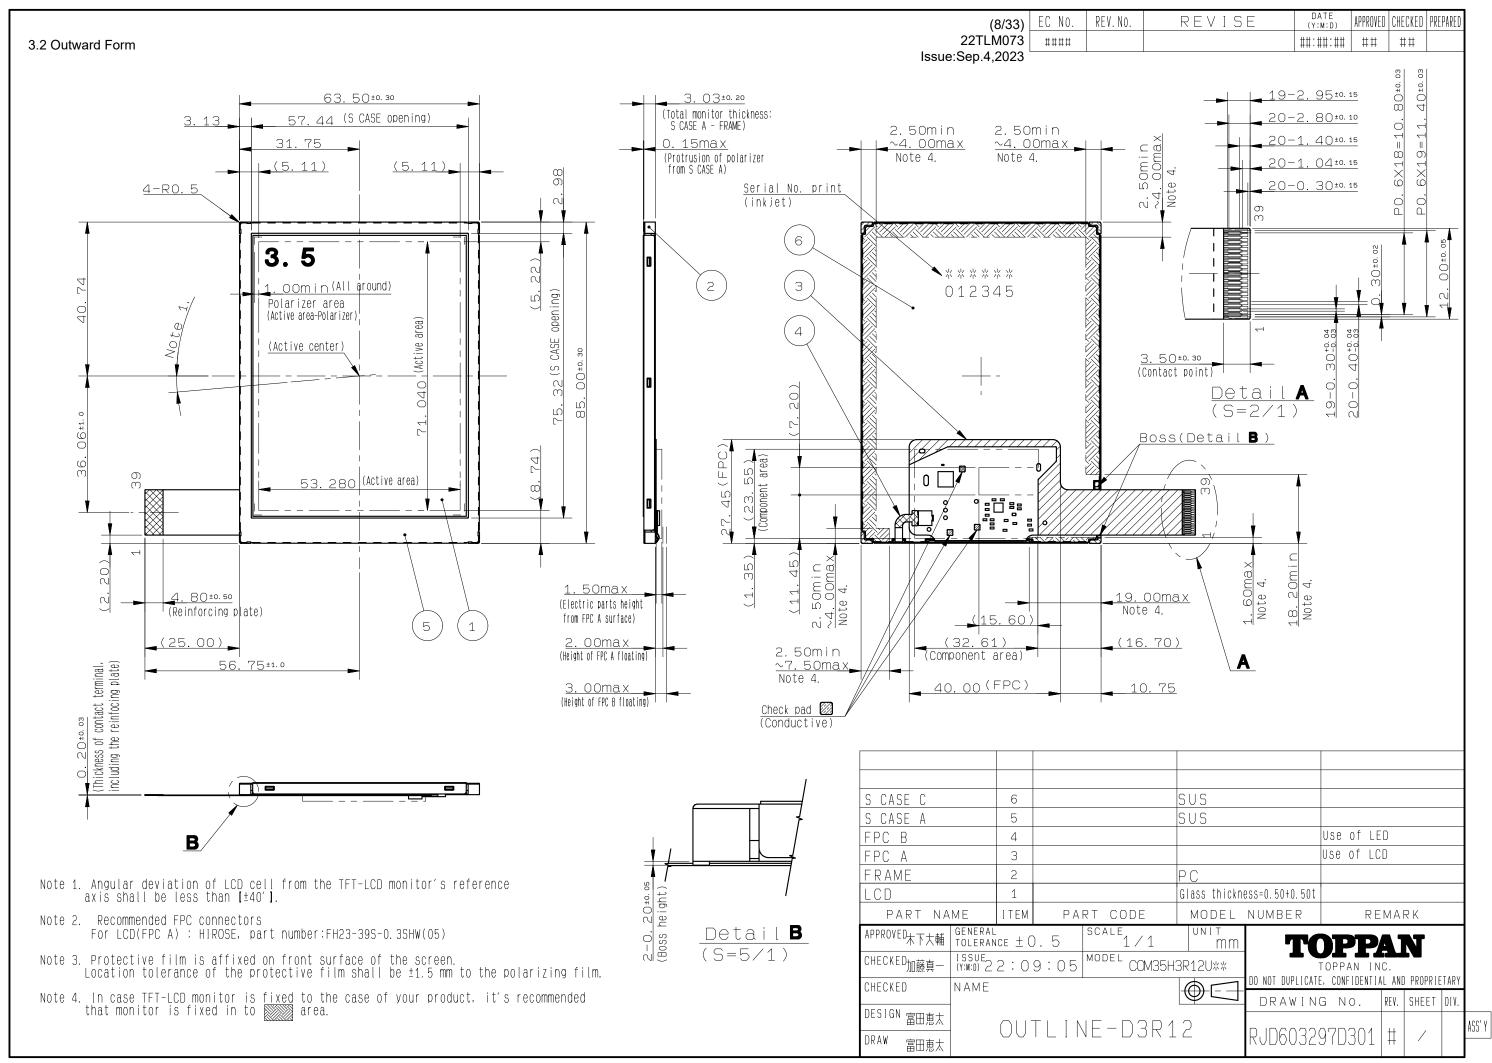

## 3.3 Serial Nº print (S-print)

## 3.3.1 Display Items

S-print indicates the least significant digit of manufacture year (1digit), manufacture month with below alphabet (1letter), model code (5characters), serial number (6digits).

\* Contents of Display

*	*	****	*****
_	_		
а	b	С	d

	Contents of display								
а	The least significant digit of manufacture year								
b	b Manufacture month Jan-A May-E Sep-I								
	Feb-B Jun-F Oct-J								
		Mar-C	Jul-G	Nov-K					
		Apr-D	Aug-H	Dec-L					
С	Model code	35RVC (Made in Jap	an)						
	35RWC (Made in Malaysia)								
d	Serial number								

<sup>\*</sup> Example of indication of Serial № print (S-print)

2L35RVC000125

means "manufactured in December 2022, 3.5" RV type, C specifications, serial number 000125"

· Made in Malaysia

2L35RWC000125

means "manufactured in December 2022, 3.5" RW type, C specifications, serial number 000125"

3.3.2 Location of Serial № print (S-print)

Refer to 3.2 "Outward Form".

## 3.3.3 Others


Please note that it is likely to disappear with an organic solvent about the Serial print.

<sup>·</sup>Made in Japan

# 4. Pin Assignment

No.	Symbol	Function						
1	VSS	Ground						
2	VSS	Ground						
3	VDD	Power supply input.						
4	VCCIO	Logic Interface Power supply input.						
5	VSS	Logic Interface Power supply input.  Ground						
6	RESETB	System reset signal input.(Lo: active)						
7	HSYNC	System reset signal input.(Lo: active)  Horizontal sync signal input. (Negative polarity)						
8	VSYNC	Vertical sync signal input.(Negative polarity)						
9	CLK	Clock input for display. (Data Input on the falling edge)						
10	VSS	Ground						
11	D00	Display data input for (B).						
12	D01	00h for black display						
13	D02	D00:LSB D05:MSB						
14	D03							
15	D04	Driver IC carries out gamma conversion internally.						
16	D05							
17	D10	Display data input for (G).						
18	D11	00h for black display						
19	D12	D10:LSB D15:MSB						
20	D13							
21	D14	Driver IC carries out gamma conversion internally.						
22	D15							
23	D20	Display data input for (R).						
24	D21	00h for black display						
25	D22	D20:LSB D25:MSB						
26	D23							
27	D24	Driver IC carries out gamma conversion internally.						
28	D25							
29	VSS	Ground						
30	DE	Input data effective signal. (It is effective for the period of "H")						
31	STBYB	Standby signal (Lo:Standby operation,Hi:Normal operation)						
32	TEST1	Connect to Ground.						
33	NC	OPEN						
34	NC	OPEN						
35	NC	OPEN						
36	NC	OPEN						
37	TEST2	Connect to Ground.						
38	BLH	LED drive power source. (Anode side)						
39	BLL	LED drive power source. (Cathode side)						

- Recommended connector: HIROSE ELECTRIC FH23 series [FH23-39S-0.3SHW(05)]
- Please make sure to check a consistency between pin assignment in "3.2 Outward Form" and your connector pin assignment when designing your circuit.
   Inconsistency in input signal assignment may cause a malfunction.
- Since FPC cable has gold plated terminals, gilt finish contact shoe connector is recommended.

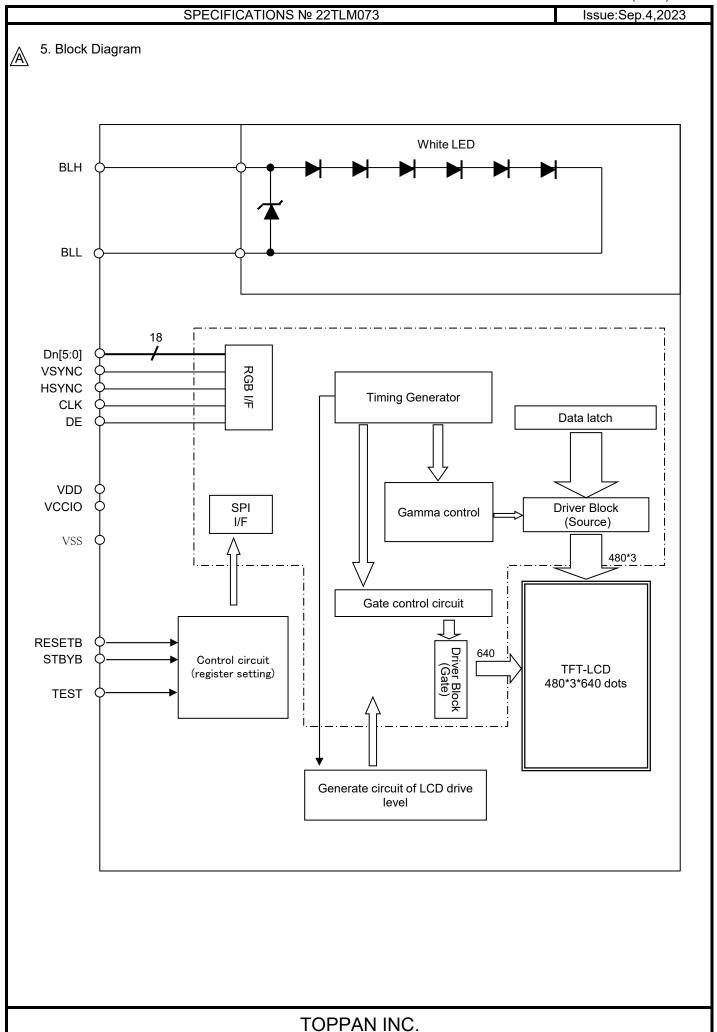

Issue:Sep.4,2023

# 6. Absolute Maximum Rating

VSS=0V

Item	Symbol	Condition	Rating		Unit	Applicable terminal
			MIN	MAX		
Supply voltage	VDD		-0.3	4.6	V	VDD
Logic interface voltage	VCCIO		-0.3	VDD	V	VCCIO
Input voltage for logic	VI		-0.3	VCCIO+0.3	V	CLK,VSYNC,HSYNC,DE D[05:00],D[15:10] D[25:20],STBYB,RESETB
Forward current	IL	Ta = 25° C		35	mA	BLH-BLL
	Ta = 70° C 15					
Storage temperature range	Tstg		-30	80	°C	
Storage humidity range	Hstg	Non condensing moisture at or les				


# 7. Recommended Operating Conditions

VSS=0V

Item	Symbol	Condition	Rating		Unit	Applicable terminal	
			MIN	TYP	MAX		
Supply voltage	VDD		2.7	3.0	3.6	V	VDD
Logic interface voltage	VCCIO		1.7	1.8	VDD	V	VCCIO
Input voltage for logic	VI		0		VCCIO	V	CLK,VSYNC,HSYNC,DE
							D[05:00],D[15:10]
							D[25:20],STBYB,RESETB
Operational temperature	Тор	Note1,2	-20	+25	+70	°C	Panel surface
range							temperature
Operating humidity range	Нор	Ta ≦ 40°C	20	-	85	%	
		$Ta > 40^{\circ}C$	Non condensing in				
			an environmental moisture at or				
			less than 40	O°C85%RH			

Note1: This monitor is operatable in this temperature range. With regard to optical characteristics, refer to Item 10."Characteristics".

Note 2: Acceptable Forward Current to LED is up to 15mA, when Ta=+70 °C. Do not exceed Allowable Forward Current shown on the chart below.

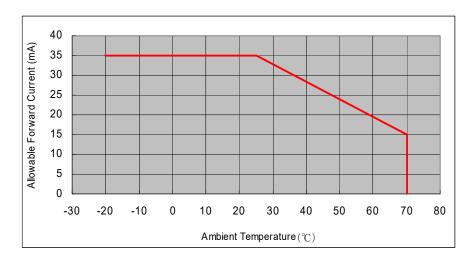

Issue:Sep.4,2023

# 8. Electrical Characteristics



A 8.1 DC Characteristics

## 8.1.1 Display Module

(Unless otherwise noted, Ta=25°C,VDD=3.0V,VCCIO=1.8V,VSS=0V)

Item	Symbol	Condition	Rating			Unit	Applicable terminal
			MIN	TYP	MAX		
Input Signal	VIH	VCCIO=1.7-VDD	0.7×VCCIO		VCCIO	V	CLK,VSYNC,HSYNC,
Voltage							DE,D[05:00],
	VIL		0		0.3×VCCIO	V	D[15:10],D[25:20],
							STBYB,RESETB
Operating	IDD	fCLK=19.8MHz	-	7.5	15.0	mA	VDD
Current	ICCIO	Color bar display	1	0.55	1.1	mA	VCCIO
Stand-by	IDDS	Other input with	1	5.0	15.0	μA	VDD
Current	ICCIOS	constant voltage			1.0	μΑ	VCCIO

## 8.1.2 Backlight

Item	Symbol	Condition		Rating		Unit	Applicable terminal
			MIN	TYP	MAX		
Forward current	IL25	Ta=25 ℃	_	10.0	35.0	mA	BLH — BLL
	IL70	Ta=70 °C	_	_	15.0	mA	]
Forward voltage	VL	Ta=25 ℃	_	16.3	17.2	V	]
(Reference		IL=10.0mA					
Value)							
Estimated Life	LL	Ta=25 ℃	_	50,000	_	hrs	
of LED		IL=10.0mA					
		Note					

Note: - The lifetime of the LED is defined as a period till the brightness of the LED decreases to the half of its initial value.


- This figure is given as a reference purpose only, and not as a guarantee.
- This figure is estimated for an LED operating alone. As the performance of an LED may differ when assembled as a monitor.
- Estimated lifetime could vary on a different temperature and usually higher temperature could reduce the life significantly.

# SPECIFICATIONS № 22TLM073

8.2 AC Characteristics

(Unless otherwise noted, Ta=25°C,VDD=3.0V,VCCIO=1.8V,VSS=0V)

					,		,
Item	Symbol	Condition		Rating		Unit	Applicable terminal
			MIN	TYP	MAX		
CLK frequency	fCLK		18	19.8	27	MHz	CLK
CLK Low period	tw1L	0.3×VCCIO or less	10			ns	
CLK High period	tw1H	0.7×VCCIO or more	10			ns	
Setup time	tsp		10			ns	CLK,VSYNC,
							HSYNC,DE,
Hold time	thd		10			ns	D[05:00],D[15:10]
							D[25:20]

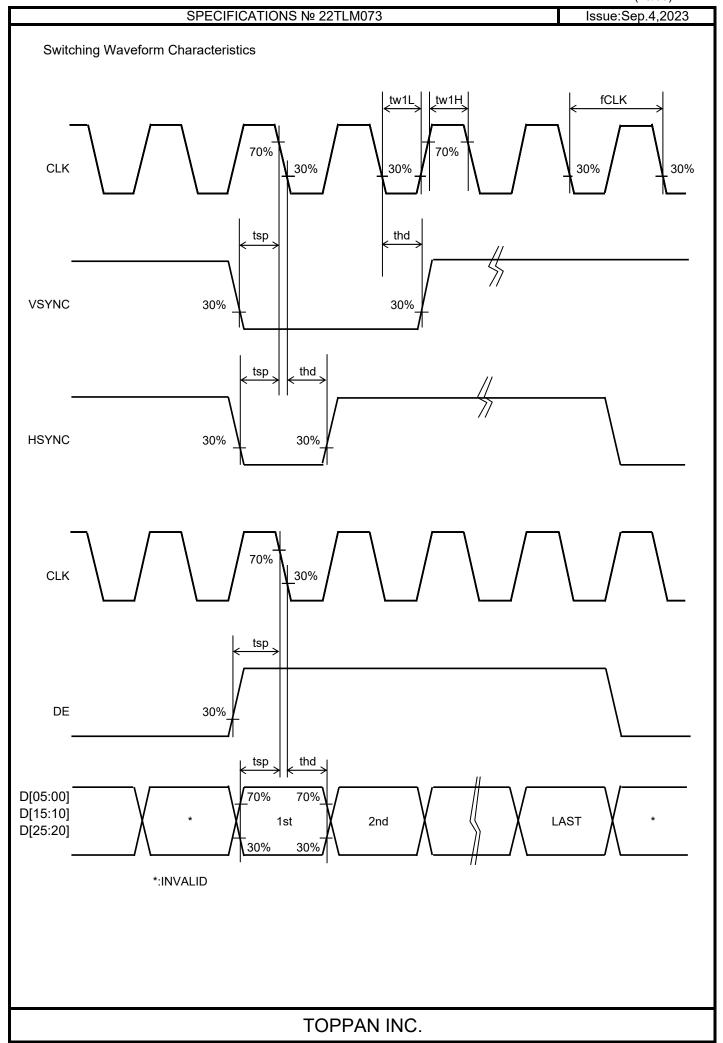



Issue:Sep.4,2023


# 8.3 Input Timing Characteristics

Item	Symbol		Rating		Unit	Applicable terminal	
		MIN	TYP	MAX			
CLK Frequency	fCLK	18	19.8	27	MHz	CLK	
VSYNC Frequency Note	fVSYNC	54	60	66	Hz	VSYNC	
VSYNC Cycle	tv	646	650	700	Н	VSYNC,HSYNC	
VSYNC Pulse Width	tw4H	2	3	50	Н	1	
Vertical Back Porch	tvb	2	3	50	Н	VSYNC,HSYNC,DE,	
Vertical Front Porch	tvf	2	4	50	Н	D[05:00],D[15:10],D[25:20]	
Vertical Display Period	tvdp		640		Н		
HSYNC frequency	fHSYNC		39.0	50.0	kHz	HSYNC	
HSYNC Cycle	th	504	508	630	CLK	CLK,HSYNC	
HSYNC Pulse Width	tw5H	5	10	140	CLK		
Horizontal Back Porch	thb	5	10	140	CLK	CLK,HSYNC,DE,	
Horizontal Front Porch	thf	5	8	140	CLK	D[05:00],D[15:10],D[25:20]	
Horizontal data start Point	tw5H+thb	19		145	CLK	1	
Horizontal Blanking Period	tw5H+thb+thf	24		150	CLK	1	
DE Pulse Width	tw6H		480		CLK	CLK,DE	
Horizontal Display Period	thdp		480		CLK	CLK,DE,	
						D[05:00],D[15:10],D[25:20]	

Note: This is recommended spec to get high quality picture on display. It is customer's risk to use out of this frequency.

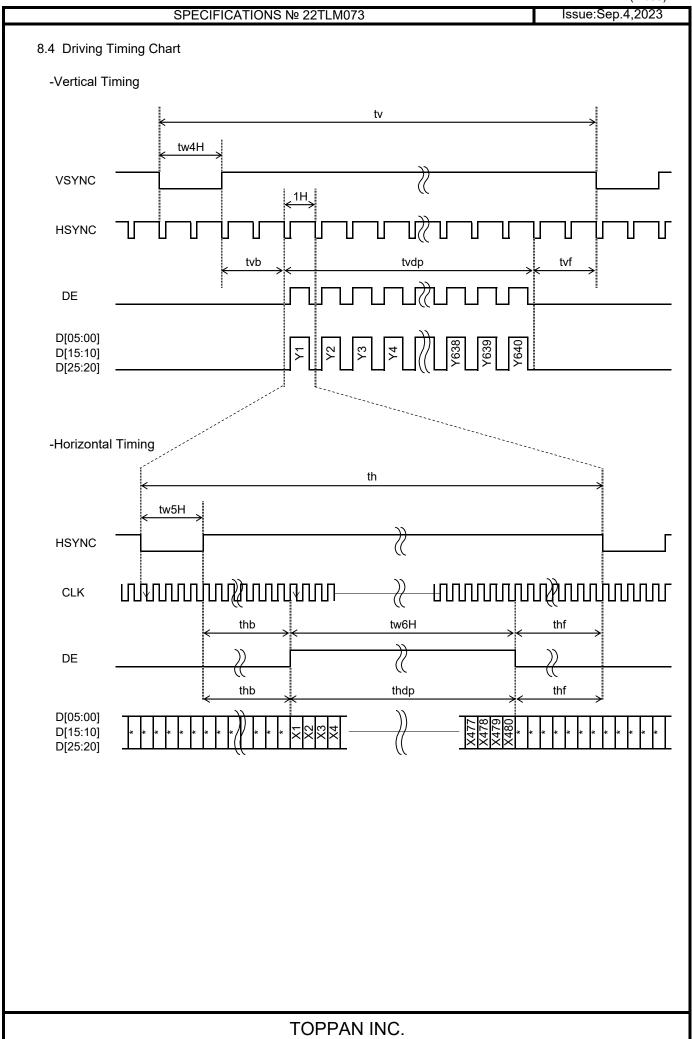

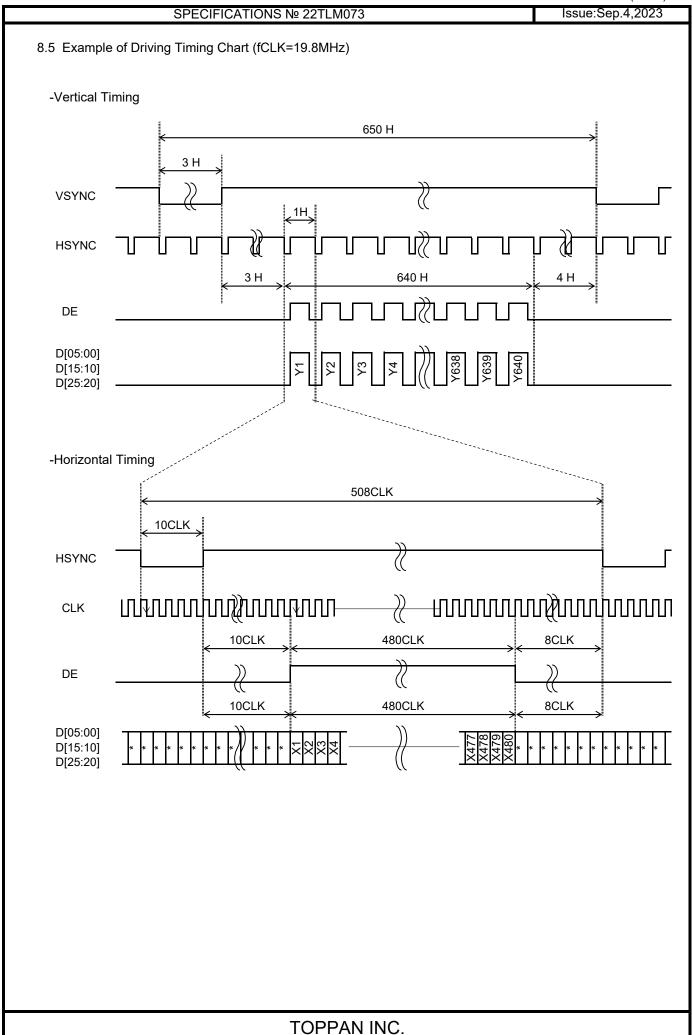

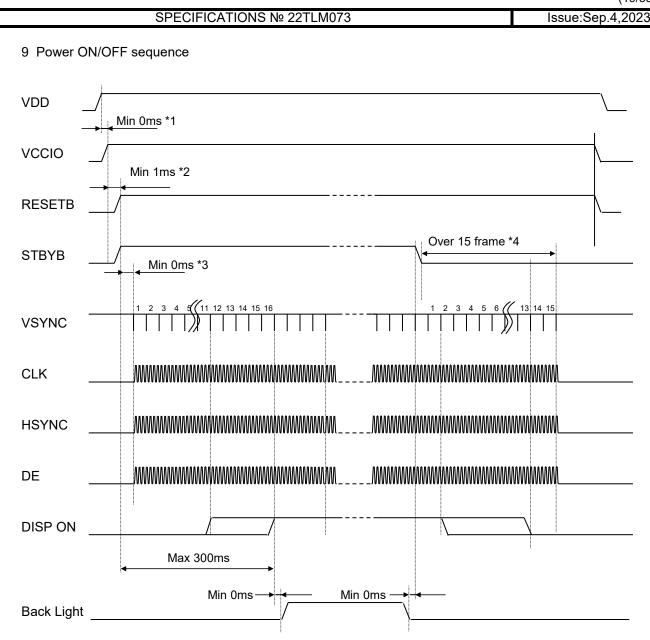

- \*1 Please start up VDD and VCCIO at the same time or in order of VDD --> VCCIO.
- \*2 After the power supply, Please execute RESETB.
- \*3 There is no regulations at time until each signal is supplied from RESETB"H" But meanwhile, It is necessary to fix each signal to "H"or"L".
- \*4 It is necessary to supply VSYNC and CLK for 15 frames or more from STBYB "L" to turning off the power supply without leaving the afterimage.

## 10. Characteristics

## 10.1 Optical Characteristics

(Measurement Condition)


Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200 (OTSUKA ELECTRONICS), EZcontrastXL88 (ELDIM)

Driving condition: VDD=3.0V,VCCIO=1.8V, VSS=0V, Optimized VCOMDC

Backlight: IL= 10.0 mA
Measured temperature: Ta = 25°C

	Item	Symbol	Condition	MIN	TYP	MAX	Unit	Note №	Remark
Response time	Rise time + Fall time	TON + TOFF	[Data]= 00h← → 3Fh	-	-	100	ms	1	
Contrast ratio	Backlight ON	CR	[Data]= 3Fh / 00h	480	800	-		2	
Con	Backlight OFF			-	2.6	-			
σ.	Left	θL	[Data]=	80	-	-	deg	3	
Viewing angle	Right	θR	3Fh / 00h	80	-	-	deg		
/ie/ an	Up	φU	CR ≧ 10	80	-	-	deg		
	Down	φD		80	-	-	deg		
White	e Chromaticity	Х	[Data]= 3Fh	White chromaticity range				4	
		у							
Cente	er Brightness		[Data]= 3Fh	230	330	-	cd/m²	5	
Brigh	tness distribution		[Data]= 3Fh	70	-	-	%	6	
Burn-	Burn-in			No noticeable burn-in image shall			7		
				be observed after 2 hours of					
				window	pattern d	isplay.			

<sup>\*</sup> Note number 1 to 7: Refer to the APPENDIX of "Reference Method for Measuring Optical Characteristics and Performance".

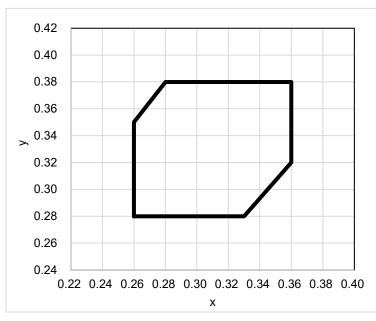

White Chromaticity Range

(White Chromaticity Range)

Х	у
0.26	0.28
0.33	0.28
0.36	0.32
0.36	0.38
0.28	0.38
0.26	0.35

Issue:Sep.4,2023

# 10.2 Temperature Characteristics

(Measurement Condition)

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200 (OTSUKA ELECTRONICS)

Driving condition: VDD=3.0V,VCCIO=1.8V, VSS=0V, Optimized VCOMDC

Backlight: IL= 10.0 mA

Item		Symbol	Specif	Remark	
			Ta = -20 °C	Ta = 70 °C	
Response time	Rise time + Fall time	TON + TOFF	500 msec or less	80 msec or less	
Contrast ratio		CR	200 or more	200 or more	Backlight ON
Display Quality			No noticeable display d should be observed.	lefect or ununiformity	

# SPECIFICATIONS № 22TLM073

# 11. Criteria of Judgment




# 🛕 11.1 Defective Display and Screen Quality

Test Condition: Observed TFT-LCD monitor from front during operation with the following conditions

Driving Signal: Raster Patter (RGB, white, black) Signal condition: [Data]:00h, 25h, 3Fh (3steps)

Observation distance: 30 cm

Illuminance: 200 to 350 lx Backlight: IL=10.0mA




De	efect item	Defect content		Criteria
	Line	Black, white or color lin	ne, 3 or more neighboring defective dots	Not exists
	defect			
lity	Dot	Uneven brightness on	dot-by-dot base due to defective	Refer to table 1
Quality	defect	TFT or CF, or dust is of	counted as dot defect	
		(brighter dot, darker do	ot)	
Display		High bright dot: Visible	through 2% ND filter at [Data]=00h	
Ö		Low bright dot: Visible	through 5% ND filter at [Data]=00h	
		Dark dot: Appear dark	through white display at [Data]=25h	
		Invisible through 5% N	ID filter at [Data]=00h	Acceptable
	Stain	Uneven brightness (wh	hite stain, black stain etc)	Invisible through 5% ND filter at Black screen. Invisible through 1% ND filter at other screen.
ΞĘ	Foreign	Point-like	0.25mm< φ	N=0
Quality	particle		0.20mm< φ ≦0.25mm	N≦2
2	2		φ ≦0.20mm	Acceptable
Screen		Liner	3.0mm <l 0.08mm<w<="" and="" td=""><td>N=0</td></l>	N=0
လွ			L≦3.0mm or W≦0.08mm	Acceptable
	Others		·	Use boundary sample
				for judgment when necessary

<sup>\*</sup> φ (mm): Average diameter = (major axis + minor axis ) / 2, W (mm): Width, L (mm): Length, N: Permissible number

## Table1

Area	High bright dot	Low bright dot	Dark dot	Total	Criteria
Α	0	2	2	3	Permissible distance between same color bright dots (includes neighboring dots): 3 mm or more
В	2	4	4	6	Permissible distance between same color high bright dots (includes neighboring dots): 5 mm or more
Total	2	4	4	7	

## <Portrait model>



Division of A and B areas

B area: Active area

Dimensional ratio between A and B areas: 1: 4: 1

(Refer to the left figure)

Issue:Sep.4,2023


# 11.2 Screen and Other Appearance

Testing conditions

Observation distance: 30 cm

Illuminance: 1200  $\sim$  2000 lx

	Item	Criteria	Remark
	Flaw	Ignore invisible defect when the backlight is on.	Applicable area: Active area only
١	Stain		(Refer to the section 3.2 Outward Form)
rize	Dirt		
olai	Dirt Bubble Dust		
۵	Dust		
	Dent		
S	case	No functional defect occurs	
FF	PC	No functional defect occurs	




# 12. Reliability Test

	Test item	Test cond	number of failures /			
				number of examinations		
	High temperature storage	Ta = 80°C	240hrs	0/3		
	Low temperature storage	Ta = -30°C	0/3			
	High temperature &	Ta = 60°C, RH = 90%,	240hrs	0/3		
ş	high humidity storage	non condensing	*			
Ourability test	High temperature operation	Tp = 70°C	240hrs	0/3		
≝	Low temperature operation	Tp = -20°C	240hrs	0/3		
ıraş	High temperature &	Tp = 40°C, RH = 90%,	240hrs	0/3		
۵	high humidity operation	non condensing	*			
	Thermal shock storage	-30°C ↔ 80°C (30min / 30min)	100cycles	0/3		
	Lightfastness	Xenon Blackpanel 63±3°C non-sho	ower	0/3		
		450W/㎡(300∼700nm) non-opera				
	Electrostatic discharge test	Confirms to EIAJ ED-4701/300, C=	0/3			
şşt	(Non operation)	Each 3 times of discharge on and p	Each 3 times of discharge on and power supply			
al te		and other terminals.				
ent	Surface discharge test	C=250pF, R=100Ω, V=±12kV		0/3		
Ĕ	(Non operation)	Each 5 times of discharge in both p	oolarities			
jo j		on the center of screen with the ca	se grounded.			
env	Vibration test	Total amplitude 1.5mm, f=10 $\sim$ 55 $\vdash$	łz,	0/3		
g		X,Y,Z directions for each 2 hours				
Mechanical environmental test	Impact test	Use TOPPAN original jig (see next	page) and	0/3		
Ş	make an impact with peak acceleration of 1000m/s <sup>2</sup> for 6 mse					
₩		with half sine-curve at 3 times to ea				
	Packing vibration-proof test	Acceleration of 19.6m/s <sup>2</sup> with frequ	0 / 1 packing			
cking est		X,Y, Zdirection for each 30 minutes				
Packing test	Packing drop test	Drop from 75cm high.		0 / 1 packing		
	-	1 time to each 6 surfaces, 3 edges	, 1 corner	-		

Note:Ta=ambient temperature Tp=Panel temperature

% The profile of high temperature/humidity storage and High Temperature/humidity operation (Pure water of over 10M $\Omega$ ·cm shall be used.)

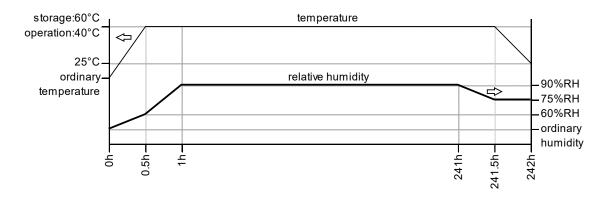


Issue:Sep.4,2023

# Table2. Reliability Criteria


The parameters should be measured after leaving the monitor at the ordinary temperature for 24 hours or more after the test completion.

Item	Standard	Remark
Display quality	No visible abnormality shall be seen.	
	(Except for unevenness by Pol deterioration.)	
Contrast ratio	200 or more	Backlight ON

# TOPPAN Original Jig

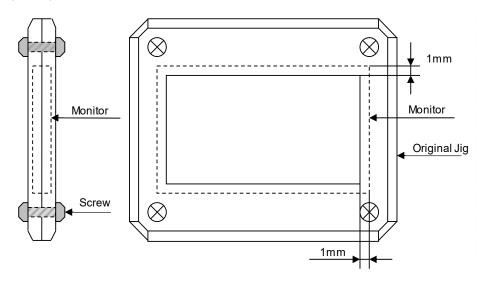

## 13. Packing Specifications

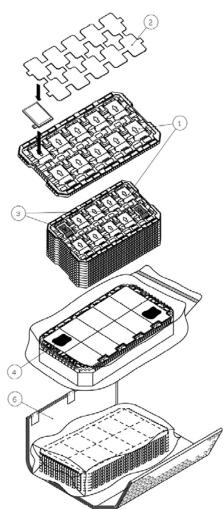

- Step 1. Each product is to be placed in one of the cut-outs of the tray with the display surface facing upward.

  Foam sheet A are to be placed on the products in the tray.

  (10 products per tray)
- Step 2. Each tray is to be piled up in same orientation and the trays be in a stack of 10.

  One empty tray is to be put on the top of stack of 10 trays.
- Step 3. 2 packs of moisture absorbers are to be placed on the top tray as shown in the drawing.Put piled trays into a sealing bag.
- Step 4. Vacuum and seal the sealing bag with the vacuum sealing machine.
- Step 5. The stack of trays in the plastic back is to be wrapped with B SHEET A.
- Step 6. The wrapped trays are placed in the carton.
- Step 7. B SHEET B are to be inserted into a outer carton with same orientation.


  The outer carton is to be sealed in H-shape with packing tape as shown in the drawing.
- Step 8. The model number, quantity of products, and shipping date are to be printed on the outer carton.

  If necessary, shipping labels or impression markings are to be put on the outer carton.

Remark: The return of packing materials is not required.

F	Packing item name	Specs., Material
1	Tray	A-PET
2	FOAM SHEET	Anti-static polyethylene
3	Drier	Moisture absorber
4	Sealing bag	
5	Packing tape	
6	B SHEET A	Anti-static air bubble sheet
7	B SHEET B	Anti-static air bubble sheet
8	Outer carton	Corrugated cardboard

Dimension of outer carton				
D : Approx.	( 356mm )			
W : Approx.	( 664mm )			
H : Approx.	( 182mm )			
Quantity of products packed in one carton: 100				
Gross weight : Approx.	6.1 kg			

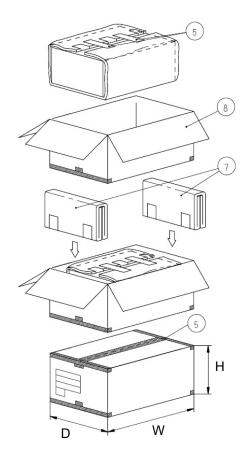

#### 14. Handling Instruction

### 14.1 Cautions for Handling LCD panels

# Ŵ

### Caution

- (1) Do not make an impact on the LCD panel glass because it may break and you may get injured from it.
- (2) If the glass breaks, do not touch it with bare hands.
  (Fragment of broken glass may stick you or you cut yourself on it.
- (3) If you get injured, receive adequate first aid and consult a medial doctor.
- (4) Do not let liquid crystal get into your mouth. (If the LCD panel glass breaks, try not let liquid crystal get into your mouth even toxic property of liquid crystal has not been confirmed.)
- (5) If liquid crystal adheres, rinse it out thoroughly.(If liquid crystal adheres to your cloth or skin, wipe it off with rubbing alcohol or wash it thoroughly with soap.If liquid crystal gets into eyes, rinse it with clean water for at least 15 minutes and consult an eye doctor.
- (6) If you scrap this products, follow a disposal standard of industrial waste that is legally valid in the community, country or territory where you reside.
- (7) Do not connect or disconnect this product while its application products is powered on.
- (8) Do not attempt to disassemble or modify this product as it is precision component.
- (9) If a part of soldering part has been exposed, and avoid contact (short-circuit) with a metallic part of the case etc. about FPC of this model, please.
   Please insulate it with the insulating tape etc. if necessary.
   The defective operation is caused, and there is a possibility to generation of heat and the ignition.
- (10) Since excess current protection circuit is not built in this TFT module, there is the possibility that LCD module or peripheral circuit become feverish and burned in case abnormal operation is generated. We recommend you to add excess current protection circuit to power supply.
- (11) The devices on the FPC are damageable to electrostatic discharge, because the terminals of the devices are exposed.
  Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors.
  Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.

#### Caution



This mark is used to indicate a precaution or an instruction which, if not correctly observed, may result in bodily injury, or material damages alone.

Issue:Sep.4,2023

#### 14.2 Precautions for Handling

- Wear finger tips at incoming inspection and for handling the TFT monitors to keep display quality and keep the working area clean.
   Do not touch the surface of the monitor as it is easily scratched.
- Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors as the LED in this TFT monitors is damageable to electrostatic discharge.
  Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.
- 3) Avoid strong mechanical shock including knocking, hitting or dropping to the TFT monitors for protecting their glass parts. Do not use the TFT monitors that have been experienced dropping or strong mechanical shock.
- 4) Do not use or storage the TFT monitors at high temperature and high humidity environment.

  Particularly, never use or storage the TFT monitors at a location where condensation builds up.
- 5) Avoid using and storing TFT monitors at a location where they are exposed to direct sunlight or ultraviolet rays to prevent the LCD panels from deterioration by ultraviolet rays.
- Do not stain or damage the contacts of the FPC cable .
   FPC cable needs to be inserted until it can reach to the end of connector slot.
   During insertion, make sure to keep the cable in a horizontal position to avoid an oblique insertion.
   Otherwise, it may cause poor contact or deteriorate reliability of the FPC cable.
- 7) The FPC cable is a design very weak to the bend and the pull as it is fixed with the tape. Do not bend or pull the FPC cable or carry the TFT monitor by holding the FPC cable.
- 8) Peel off the protective film on the TFT monitors during mounting process.Refer to the section 14.5 on how to peel off the protective film.We are not responsible for electrostatic discharge failures or other defects occur when peeling off the protective film.

### 14.3 Precautions for Operation

- Since this TFT monitors are not equipped with light shielding for the driver IC,
   do not expose the driver IC to strong lights during operation as it may cause functional failures.
- 2) In case of powering up or powering off this LCD module, be sure to comply the sequence as instructed in this specification.
- 3) Do not plug in or out the FPC cable while power supply is switch on. Plug the FPC cable in and out while power supply is switched off.
- 4) Do not operate the TFT monitors in the strong magnetic field. It may break the TFT monitors.
- 5) Do not display a fixed image on the screen for a long time.

  Use a screen-saver or other measures to avoid a fixed image displayed on the screen for a long time.

  Otherwise, it may cause burn-in image on the screen due the characteristics of liquid crystal.

Issue:Sep.4,2023

## 14.4 Storage Condition for Shipping Cartons

(Storage environment)

Temperature 0 to 40°CHumidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period 1 year

Unpacking To prevent damages caused by static electricity, anti-static precautionary measures

(e.g. earthing, anti-static mat) should be implemented.

After unpack, keep product in the appropriate condition,

otherwise bubble seal of Protective film may be printed on Polarizer.

Maximum piling up 8 cartons(excluding the bottom)

## \*Conditions to storage after unpacking

## (Storage environment)

Temperature 0 to 40°CHumidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

• Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period 1 year (Shelf life)

Others Keep/ store away from direct sunlight

Storage goods on original tray made by TOPPAN.

## 14.5 Precautions for Peeling off the Protective film

The followings work environment and work method are recommended to prevent the TFT monitors from static damage or adhesion of dust when peeling off the protective films.


#### A) Work Environment

- a) Humidity: 50 to 70 %RH, Temperature15 to 27 °C
- b) Operators should wear conductive shoes, conductive clothes, conductive finger tips and grounded wrist-straps. Use an electrostatic neutralization blower.
- c) Anti-static treatment should be implemented to work area's floor.
   Use a room shielded against outside dust with sticky floor mat laid at the entrance to eliminate dirt.

#### B) Work Method

The following procedures should taken to prevent the driver ICs from charging and discharging.

- a) Use an electrostatic neutralization blower to blow air on the TFT monitors to its lower left when FPC case is placed at the bottom.
   Optimize direction of the blowing air and the distance between the TFT monitors and the electrostatic neutralization blower.
- b) Put an adhesive tape (Scotch tape, etc) at the lower left corner area of the protective film to prevent scratch on surface of TFT monitors.
- c) Peel off the adhesive tape slowly (spending more than 2 secs to complete) by pulling it to opposite direction.

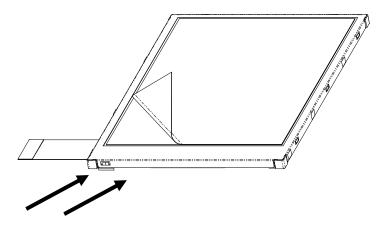

Blower wind direction
(Set an ion blower with its adequate conditions.)

## 14.6 Warranty

TOPPAN is only liable to defective goods which is stored and used under the condition complying with this specifications and returned within 1 (one) year.

Warranty caused by manufacturing defect shall be conducted by replacement of goods or refundment at unit price.

## **APPENDIX**

Reference Method for Measuring Optical Characteristics and Performance

1. Measurement Condition (Backlight ON)

 $Measuring\ instruments:\ CS2000\ (KONICA\ MINOLTA),\ LCD7200\ (OTSUKA\ ELECTRONICS), EZcontrastXL88\ (ELDIM)$ 


Driving condition: Refer to the section "Optical Characteristics"

Measured temperature: 25°C unless specified

Measurement system: See the chart below. The luminance meter is placed on the normal line of measurement system.

Measurement point: At the center of the screen unless otherwise specified

Dark box at constant temperature

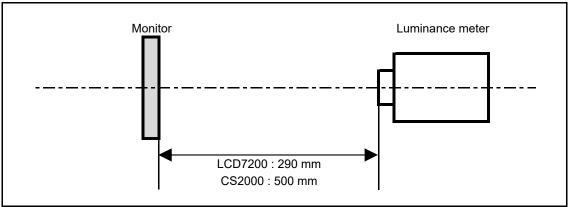


<sup>\*</sup>Measurement is made after 30 minutes of lighting of the backlight.

Measurement point: At the center point of the screen

Brightness distribution: 9 points shown in the following drawing.

#### <Portrait model>

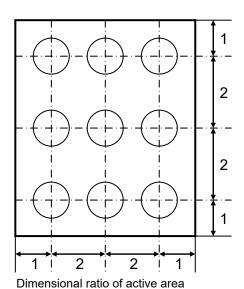

Backlight IL=10.0mA


Measurement Condition (Contrast ratio Backlight OFF only)


Measuring instruments: LCD7200(OTSUKA ELECTRONICS), Ring Light (40,000 lx,  $\phi$ 58)

Driving condition: Refer to the section "Optical Characteristics"

Measured temperature: 25°C unless specified Measurement system: See the chart below.

Measurement point: At the center of the screen unless otherwise specified

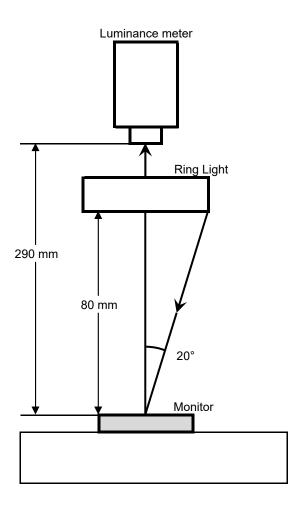



		Issue:Sep.4,202			
2. Test Method					
otice	Item	Test method	Measuring	Remark	
			instrument		
1	Response	Measure output signal waveform by the luminance	LCD7200	Black display	
	time	meter when raster of window pattern is changed from		[Data]=00h	
		white to black and from black to white.		White display	
		Black White Black		[Data]=3Fh	
		100%		TON	
		./ A.		Rise time	
		90%		TOFF	
				Fall time	
		10%			
		0%			
		▼ TON ▼ TOFF			
2	Contrast ratio	Measure maximum luminance Y1([Data]=3Fh) and	CS2000	Backlight ON	
		minimum luminance Y2([Data]=00h) at the center of	LCD7200	Backlight OFF	
		the screen by displaying raster or window pattern.			
		Then calculate the ratio between these two values.			
		Contrast ratio = Y1/Y2			
		Diameter of measuring point: 7.8mmφ(CS2000)			
		Diameter of measuring point: 3mmφ(LCD7200)			
3	Viewing angle	Move the luminance meter from right to left and up	EZcontrastXL88		
		and down and determine the angles where			
	Horizontalθ	contrast ratio is 10.			
	Verticalφ				
4	White	Measure chromaticity coordinates x and y of CIE1931	CS2000		
	chromaticity	colorimetric system at [Data] = 3Fh			
		Color matching function: 2°view			
		measurement angle: 1°			
5	Center	Measure the brightness at the center of the screen.	CS2000		
J	brightness	inicasure the phythiness at the center of the scient.	002000		
6	Brightness	(Brightness distribution) = 100 x B/A %	CS2000		
	distribution	A : max. brightness of the 9 points			
		B : min. brightness of the 9 points			
7	Burn-in			At optimized	
		after 2 hours of "window display" ([Data]=00h/3Fh).		VCOMDC	
		, , , , ,			



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

#### Germany





#### FORTEC Elektronik AG

Augsburger Str. 2b 82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

#### **Fortec Group Members**

#### Austria





#### Distec GmbH Office Vienna

Nuschinggasse 12 1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

#### Germany





#### Distec GmbH

Augsburger Str. 2b 82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
www.distec.de

#### Switzerland





#### ALTRAC AG

Bahnhofstraße 3 5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

### **United Kingdom**





## Display Technology Ltd.

Osprey House, 1 Osprey Court Hichingbrooke Business Park Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600

E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

## USA





## Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apollodisplays.com
Internet: www.apollodisplays.com