



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



FORTEC
INTEGRATED



FORTEC
UNITED KINGDOM



Datasheet

NEXCOM

NDiS B561S

Visual Edge Computer Powered by 12th Gen Intel® Core™ Processor



Main Features

- Support 12th Gen Intel® Core™ i7/i5/i3 socket type processor
- Intel® PCH H610E
- Intel® integrated UHD graphic engine
- Support 2 independent 4K@60Hz display output
- Operating temperature: 0~50°C
- 2 x HDMI 2.0
- 2 x USB 3.2, 4 x USB 2.0
- 1 x RS-232/422/485, 3 x RS232
- 1 x GbE LAN, 1 x 2.5G GbE LAN
- 3 x M.2 socket Key B/E/M

Product Overview

Powered by the 12th Gen Intel® Core™ processor series and Intel® 600 series chipset integrated graphics controller, the NDiS B561S fanless visual edge computer can handle powerful multimedia content. With two 4K2K independent display output and rich connectivities including 6 x USB, 2 x LAN ports, Wi-Fi 6E and 4G, 5G support, the NDiS B561S can fully satisfy customer's expectation and therefore be used in both in-door and various applications such as self-service KIOSK, vending machine, hospitality, public transportation information system, ticketing machine, gateway, healthcare machine and AI at access management equipment.

Specifications

CPU Support

- 12th Gen Intel® Core™ i7/i5/i3 LGA socket type processor, up to 35W
 - Intel® Core™ i7-12700TE, 12 Core, 1.4GHz, 25M Cache
 - Intel® Core™ i5-12500TE, 6 Core, 1.9GHz, 18M Cache
 - Intel® Core™ i3-12100TE, 4 Core, 2.1GHz, 12M Cache

Chipset

- Intel® PCH H610E

Graphics

- Intel® UHD graphics 770 series

Main Memory

- 2 x 262-pin SO-DIMM sockets, support DDR5 4800 MHz non-ECC, un-buffered memory up to 64G (single socket max. 32GB)

I/O Interface-Front

- 1 x Power button
- 1 x Power LED, 1 x HDD LED
- 1 x Reset switch
- 2 x USB 2.0
- 4 x DB9 for COM1~COM4
 - COM1: RS-232/422/485
 - COM2~4: RS232
- 2 x Antenna hole

I/O Interface-Rear

- +12V DC-in
- 2 x HDMI 2.0 support 4K@60Hz
- 2 x USB 3.2, 2 x USB 2.0
- 1 x Intel® I219-LM GbE LAN port
- 1 x Intel® I226V 2.5G Ethernet LAN port
- 1 x SIM slot*

* NOTE:

NDiS B561 Series is designed with 2x SIM slots. Dual SIM functionality depends on whether the LTE module specification. For example, when using QUECTEL EM06-E module, only one SIM card functions either through back-panel slot or internal slot.

- 2 x Antenna hole

I/O Interface-Internal

- 8CH GPIO support 4 x GPO and 4 x GPI
- Onboard TPM 2.0


Storage

- 1 x M.2 2280 Key M (PCIe x4) socket (Top side)
- 1 x M.2 2280 Key M (SATA) socket (Back side)

Environment

- Operating temperature: 0°C to 50°C with 0.7 m/s air flow
- Storage temperature: -20°C to 80°C
- Humidity: 10 to 95% (non-condensing)

Dimension Drawing

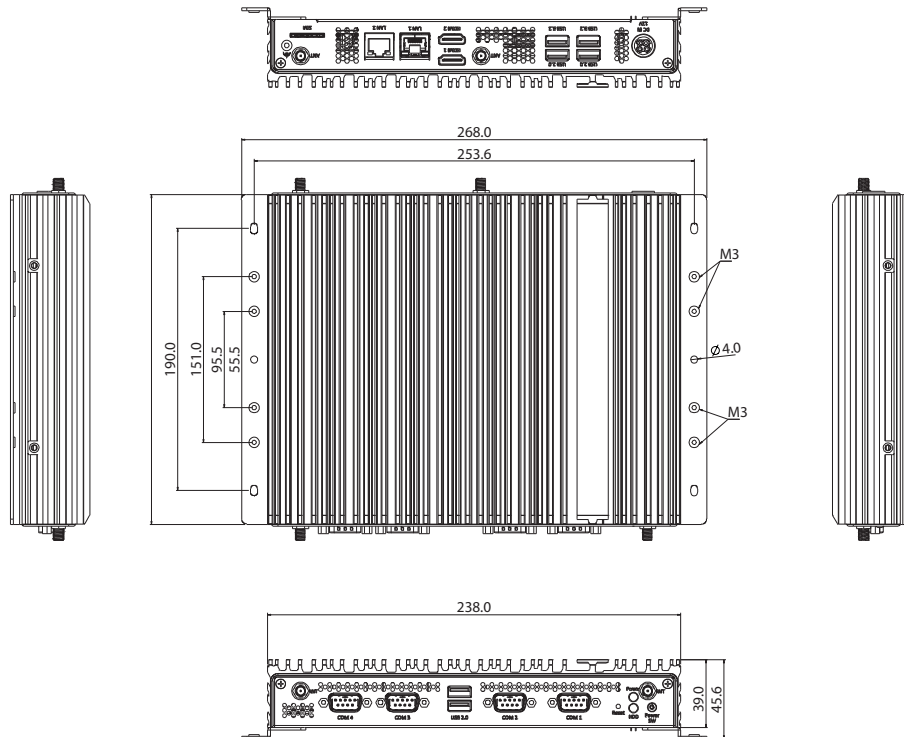

Expansion

- 1 x M.2 2230 Key E (PCIe x2, USB), support optional Wi-Fi modules
- 1 x M.2 3042/3052 Key B (PCIe x1, USB 3.2), support optional 3G, 4G or 5G modules
- 1 x SIM slot*

* NOTE:

NDIS B561 Series is designed with 2x SIM slots. Dual SIM functionality depends on whether the LTE module specification. For example, when using QUECTEL EM06-Emodule, only one SIM card functions either through back-panel slot or internal slot.

Power Supply

- 1 x External 120W AC/DC power adapter
- Input: 100VAC to 240VAC
- DC Output: +12 VDC

Package Information

- 1 pc/carton
- G.W: 3.9kgs
- Dimension: 420 x 275 x 127mm

Certification

- CE Approval (EN55032/55035)
- FCC Class A (Part 15B)

Dimensions

- 238mm (W) x 190mm (D) x 39mm (H) w/o bracket

Operating System Support

- Win11/10/Linux

Ordering Information

- **NDIS B561S (P/N: 10W00B56100X0)**
12th Gen Intel® Core™ processor (up to 35W) fanless system, Intel® H610E chipset

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC
GROUP

FORTEC Elektronik AG
Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



FORTEC
INTEGRATED

FORTEC Integrated GmbH Office Vienna
Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@fortec-integrated.de
Internet: www.fortec-integrated.de

Germany



FORTEC
INTEGRATED

FORTEC Integrated GmbH
Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@fortec-integrated.de
Internet: www.fortec-integrated.de

Switzerland



FORTEC
SWITZERLAND

FORTEC Switzerland AG
Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@fortec.ch
Internet: www.fortec.ch

United Kingdom



FORTEC
UNITED KINGDOM

FORTEC Technology UK Ltd.
Osprey House, 1 Osprey Court
Hinchingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@fortec.uk
Internet: www.fortec.uk

USA



 **APOLLO DISPLAY**
TECHNOLOGIES
A FORTEC GROUP MEMBER

Apollo Display Technologies, Corp.
87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com